NANO[™] Cordless Tool System

36V LI-ION CORDLESS



Up to 2-3X the Runtime of 18V

• DeWalt's Heavy-Duty 36V NANO™ Phosphate Lithium Ion batteries delivers 2-3X the runtime of comparable 18V NiCad batteries.

No Memory & Virtually No Self-Discharge

· For maximum productivity and less downtime.

Part No.	Description
DC9360	36V NANO™ Replacement Battery

Lightweight Design

• 2.4 lbs, the same weight as DeWalt 18V NiCad batteries



2,000 Recharges



DEWALT 36V Reciprocating Saw Kit

- 4-position keyless blade clamp allows quick blade change, flush cutting, and versatility.
- Anti-slip comfort grip for better control.
- 3-position adjustable shoe for adjusting depth of cut and extends blade life.
- 36V high performance battery pack provides long run-time and battery life.
- DEWALT® built high power, and high efficiency motor with electric brake powers through the toughest applications.
- KIT Includes (1) battery, 1 hour charger, (1) reciprocating saw blade & impactresistant case.

Specifications

36 V DC Volts: Strokes per Minute: 0-3,000 SPM 1-1/8" Stroke Length: Electric Brake: Yes Weight: 8.4 lbs

Part No. Description

DC305K 36V Reciprocating Saw Kit



DEWALT 36V 1/2" Hammerdrill/ **Drill/Driver Kit**

- DEWALT® built high power, high efficiency motor for superior performance in all drilling and fastening applications.
- 36V high performance battery pack provides long run-time and battery life.
- Patented 3-speed all-metal transmission for optimal performance.
- Heavy-duty ½" self-tightening chuck tightens throughout operation providing superior bit gripping strength.
- Anti-Slip comfort grip provides increased comfort and control.
- KIT Includes (2) batteries, 1 hour charger, 360° side handle & impact-resistant case.

Specifications

Volts: 36 V DC Max. Power: 750 UWO

of Speed Settings: 3

0-400/0-1,200/ Max RPM: 0-1,600 Max BPM 0-6,800/0-20,400

0-27,200 Weight: 6.9 lbs.

Part No. Description

DC900KL 36V 1/2" Hammerdrill/Drill/

Driver Kit



DEWALT 36V 71/4" Circular Saw Kit

- · All-metal keyless blade change system for quick and easy blade changes.
- 0-50° bevel capacity with lever-action detents at 22.5° and 45° allows for aggressive bevel cuts while allowing users to locate common angles quickly.
- DEWALT® built, high power, high efficiency motor with electric brake is powerful enough for the toughest applications.
- High-strength magnesium shoe and upper guard provides increased durability for long-term cut accuracy.
- 36V high performance battery pack provides long run-time & battery life.
- KIT Includes (1) battery, 1 hour charger, (1) 71/4" carbide-tipped saw blade, rip fence & impact-resistant case.

Specifications

Volts: 36 V DC No Load Speed: 4.000 RPM **Bevel Capacity:** 0-50 degrees Arbor Size:

Depth of Cut @ 45°: 1-5/8" Depth of Cut @ 90°: 2-7/16" Weight: 9.9 lbs.

Part No. Description

DC300K 36V 71/4" Circular Saw Kit







DEWALT 36V Jig Saw Kit

- · All-metal, lever-action keyless blade change allows for quick δ easy blade changes.
- All-metal keyless shoe bevel with detents at 0°, 15°, 30° and 45° provides versatility for easy bevel cutting.
- 4-position orbital action provides control of aggressiveness of cut and speed.
- Adjustable dust blower keeps line of cut clear of chips.
- 36V high performance battery pack provides long run-time & battery life.
- Anti-slip comfort grip provides increased comfort and control.
- KIT Includes (1) battery, 1 hour charger, (1) jig saw blade & impact-resistant case.

Specifications

Volts: 36 V DC Strokes per Minute: 0-2,700 SPM

Stroke Length: Electric Brake: Yes Weight: 8.4 lbs.

Part No. Description

DC308K 36V Jig Saw Kit



DEWALT

36V 1" SDS Rotary Hammer Kit

- SHOCKS[™] Active Vibration Control significantly reduces vibration & increases user comfort & productivity.
- Optimally balanced compact L-shape design allows access in tight spaces.
- 2.0 ft-lbs impact energy provides corded power without the cord.
- DEWALT® built high torque, high efficiency motor delivers maximum performance in all drilling applications.
- 36V high performance battery pack provides long run-time & battery life.
- Variable speed, reversing switch delivers versatility in all applications.
- · Factory-set clutch reduces sudden, high torque reactions if bit jams.
- Electro-pneumatic hammer mechanism for fast penetration δ low vibration.
- 360° side handle for better control & ease of use in tight spaces.
- KIT Includes (2) batteries, 1 hour charger, 360° side handle, depth rod & impact-resistant case.

Specifications

36 V DC Volts: No Load Speed: 0-1,150 RPM 0-4,400 BPM Blows per Minute: Weight: 7.5 lbs.

Part No. Description

DC233KL 36V 1" SDS Rotary Hammer Kit

LITHIUM ION



DEWALT

36V 1/2" Torque Impact Wrench Kit

- DEWALT® built high power, high efficiency motor with replaceable brushes delivers maximum performance in all fastening applications.
- 36V high performance battery pack provides long run-time and battery life.
- Preferred rocker switch design for fast and easy forward and reverse.
- Patented all-metal anvil provides durability and prevents shearing.
- Anti-slip comfort grip provides increased comfort and control.
- High speed all-metal transmission delivers 1,400 rpm for increased productivity.
- KIT Includes (2) batteries, 1 hour charger δ impact-resistant case.

Specifications

Volts: 36 V DC No Load Speed: 1,400 RPM Impacts per Minute: 2,500 BPM 3,900 in.-lbs. Max Torque: 325 ft.-lbs.

Weight: 7.5 lbs.

Part No. Description

DC800KL 36V 1/2" Impact Wrench Kit

Specifications

36 V DC Volts: No Load Speed: 6,500 RPM Spindle Thread: 5/8"-11

Wheel Selection: Above 10.000 RPM

Description

Weight: 7.2 lbs.

DC415KL 36V 41/2"cut-Off Tool Kit

- Convenient trigger switch with spindle lock-off button for easier gripping.
- 2 Position side handle offers greater comfort and control.
- Quick-change wheel release provides easier and quicker wheel removal without the need for a wrench.
- Jam-pot, low profile gear case provides precise gear alignment for a smoother, quieter transmission while allowing access to tight spaces.
- KIT Includes (2) batteries, 1 hour charger, (1) Type 27 Guard, (1) Type 1 Guard, Wrench, Matched Flanges, Type 27 Grinding Wheel, Type 1 Cutting Wheel, side handle & impact-resistant case.

DEWALT 36V 41/2" Cut-Off Tool Kit



Part No.

36 P

DEWALT

Combination Kits with NANO™ Technology



DCX6200

Two or Four 36V Tools in one convenient pack! 3 kits to choose from.

4 Tool Combo Kit DCX6401

- DC305 36V Reciprocating Saw
- DC900 1/2" HammerDrill/Drill/Driver
- DC300 71/4" Circular Saw
- DC509 36V Flexible Floodlight
- Also Includes: (2) 36V Battery Packs, 360° Side Handle, #2 Phillips Bit, 71/4" Carbide-tipped Saw Blade, rip fence, reciprocating saw blade, 1-Hour Charger & Kit Box.

Part No.

Description

DCX6401 4 Tool Combo Kit

2 Tool Combo Kit DCX6200

- DC900 1/2" HammerDrill/Drill/Driver
- DC300 71/4" Circular Saw
- Also Includes: (2) 36V Battery Packs, 360° Side Handle, 71/4" Carbide-tipped saw blade, rip fence, 1-Hour Charger & Contractor's Bag.

Part No. Description

DCX6200 2 Tool Combo Kit

2 Tool Combo Kit DCX6210

- DC900 1/2" HammerDrill/Drill/Driver
- DC305 36V Reciprocating Saw
- Also Includes: (2) 36V Battery Packs, 360° Side Handle, reciprocating sa blade, rip fence, 1-Hour Charger & Contractor's Bag.

Part No. Description

DCX6210 2 Tool Combo Kit

DCX6210



DEWALT 36V Li-Ion Battery Pack with NANO[™] Technology

- · Provides high power for corded performance
- Delivers 2-3x more run-time vs. 18V NiCad batteries.
- Offers long-life and durability 2000 recharges
- Lightweight design 2.4 lbs, the same as DeWalt 18V Nicad battery
- · Battery fuel gauge indicates how much charge is left in battery.
- · No memory and virtually no self-discharge.

Specifications

Voltage: 36 V DC

Entire line of DeWalt Compatible With:

36V Tools

Weight: 2.4 lbs.

Description Part No.

DC9360

248

36V Battery Pack w/NANO™ Technology

Accessories



DEWALT 28V - 36V 1 Hour Charger

- 1-Hr Charging for minimal downtime.
- 3-Stage charging system provides maximum run-time and extends overall life of battery.
- · Battery fuel gauge indicates how much charge is left in battery.
- Cord wrap for improved cord storage.

Specifications

28 - 36 V DC Voltage: Bulb: Xenon Compatible With: 28-36V DeWalt **Battery Packs**

Weight: 1.9 lbs.

Part No. Description

DC9000 28V-36V Battery Charger



DEWALT 36V & 28V Floodlight

- Flex neck design with lockable head clips allow for hands free use and versatility to stand or hang light.
- Wide angle beam of light provides more light than a conventional flashlight.
- Xenon bulb provides extra bright beam of light.
- 8 hours run-time on a single charge.

Specifications

Volts: 28V & 36 V DC Bulb: Xenon Run-Time: 8 hours Weight: 1.14 lbs.

Part No. Description

DC509 36V Floodlight DC519 28V Floodlight





Milwankee



M28[™] LI-ION CORDLESS

Up to 2X the Runtime of 18V


 Milwaukee's 28 volt, 3.0 Amp-Hr battery has 2X the runtime of comparable 18V 2.8 Amp-Hr. NiCd packs.

No Memory Effect

 M28 batteries can be recharged at any time without creating a memory effect, regardless of the pack's current charge level

Compact Li-Ion Power

• Lighter weight than 18V NiCd & NiMH packs..

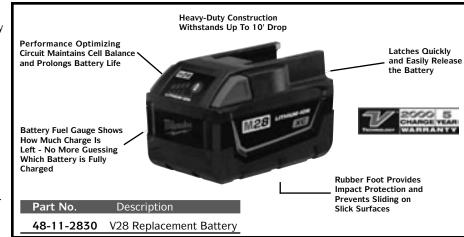

Longer Pack Life

• The combination of Milwaukee's specialized high power Lithiumlon battery cells and their performance optimizing circuit, provides up to 2½ times more lifetime work output when compared today's 18V NiCd.

Fade-Free Power

 Unlike NiCd batteries,M28 Li-Ion batteries maintain their power level throughout their entire discharge cycle. The last cut (hole drilled, etc.) feels as powerful as the first. This mean more productivity per battery.





- Heavy-duty 2-speed gear box.
- Metal Hammer Selector.
- ½" Metal Ratcheting Chuck with carbide jaws for superior gripping strength.
- Reversible Battery Pack allows users to change tool balance for overhead work or to fit in tight places.
- Comfortable, Non-Slip Soft-Grip reduces vibration and fatigue.
- Available in KIT or TOOL ONLY.

 KIT Includes (2) batteries, 1 hour charger, side handle, Phillips bit, and case.

Specifications

 Volts:
 28 Volts DC / 3.0 Amp-Hrs.

 No Load RPM:
 Low 0-600 / High 0-1800

 No Load BPM:
 Low 0-9,000 / High 0-27,000

 Torque:
 750 in-lbs.

Weight: 6.7 lbs. w/battery / 4.4 lbs w/o battery

Part No. Description

0726-24 M28 1/2" Hammer Driver/Drill Kit **0726-20** M28 1/2" Hammer Driver/Drill Tool Only





- Feels and cuts like a corded saw.
- Exclusive Gear Protecting Clutch for long life.
- Rugged metal Quik-Lok® Blade Clamp and Adjustable Shoe for fast, tool-free blade changes and adjustments.
- High/Low Speed Selector Switch with Lock.
- Comfortable, Non-Slip Soft-Grip reduces vibration and fatigue.
- Available in KIT or TOOL ONLY.

 KIT Includes (2) batteries, 1 hour charger, (2) Sawzall® blades, and impact-resistant case.

Specifications

Volts: 28 Volts DC / 3.0 Amp-Hrs.

Stroke Length: 1-1/8"

Strokes Per Minute: Low 0-2,000 / High 0-3,000

Length: 18 in.

Weight: 9.1 lbs. w/battery / 6.8 lbs w/o battery

Part No. Description

0719-22 M28 Sawzall Reciprocating Saw Kit

0719-20 M28 Sawzall Reciprocating Saw Tool Only

M28[™] LI-ION CORDLESS





Lithium-Ion 1/2" Square Drive **Impact Wrench**

- Flat Head Detent Pin for secure socket .retention. (Also includes round head pin).
- Magnesium Gearcase for added durability and lighter weight.
- Reversible Battery Pack allows users to change tool balance for overhead work or to fit in tight places.
- Hanger Bracket with solid steel ring.
- Comfortable, Non-Slip Soft-Grip reduces vibration and fatigue.
- Available in KIT or TOOL ONLY.



• KIT Includes (2) batteries, 1 hour charger and impact-resistant case.

Specifications

Volts: 28 V DC / 3.0 Amp-Hrs. Max. Torque: 325 ft.-lbs. / 3900 in.-lbs.

No Load RPM: 0 - 1,450Impacts perMinute: 0-2,450

Weight: 8.9 lbs. w/battery / 6.6 lbs w/o battery

Part No.	Description
0779-22	M28 1/2" Impact Wrench Kit
0779-20	M28 1/2" Impact Wrench Tool Only





7/16" Quick-Change Impact Wrench

- Variable speed control.
- Magnesium Gearcase for added durability and lighter weight.
- Reversible Battery Pack allows users to change tool balance for overhead work or to fit in tight places.
- Comfortable, Non-Slip Soft-Grip reduces vibration and fatigue.
- Available as **TOOL ONLY**. Batteries and charger sold seperately

Specifications

Volts: 28 V DC / 3.0 Amp-Hrs. Max. Torque: 325 ft.-lbs. / 3900 in.-lbs.

No Load RPM: 0-1.450 Impacts per Minute: 0-2,450

Weight: 7.6 lbs w/o battery

Part No. Description

0799-20 M28 7/16" Quick-Change Impact Wrench Tool Only



Lithium-Ion 1/2" Right Angle Drill

- Head swivels 360° Can be locked in any position.
- Heavy-duty gear box.
- Comfortable two-finger variable speed control with easy to reach forward/reverse lever.
- Comfortable, Non-Slip Soft-Grip reduces vibration and fatigue.
- Available in **KIT** or **TOOL ONLY** (Incl. side handle & chuck key).

• KIT Includes (1) battery, 1 hour charger, side handle, chuck key and impact-resistant case

Specifications

Volts: 28 V DC / 3.0 Amp-Hrs. No Load RPM: 0-1000 High / 0-400 Low Max Torque: 0-1081 in.-lbs. Low Gear

10.9 lbs. w/battery / 8.6 lbs w/o battery Weight:

Part No.	Description	
0721-21	M28 ½" Right Angle Drill Kit	
0721-20	M28 1/2" Right Angle Drill Tool Only	



Mag Lithium-lon

1" Compact SDS Rotary Hammer

- 3 modes of operation Hammer Drill / Drill / Chipping.
- Compact L-Shaped design. Only 11-1/8" from grip to chuck for easy access to tight spaces.
- Heavy-duty metal gear box and block construction.
- Keyless SDS chuck for fast, tool-free bit changes.
- ullet Variable speed trigger δ reverse switch for accurate drill bit starting δ easy bit/fastener removal.
- Comfortable, Non-Slip Soft-Grip reduces vibration and fatigue.
- Available in **KIT** or **TOOL ONLY** (incl. side handle & depth guage).

• KIT Includes (2) batteries, 1 hour charger, side handle, depth guage and impact-resistant case

Specifications

Volts: 28 V DC / 3.0 Amp-Hrs.

No Load RPM: 0-1400 No Load BPM: 4700 Impact Energy: 2.1 ft.-lbs.

Weight: 9.6 lbs. w/battery / 7.3 lbs w/o battery

Part No. Description

0756-22 M28 1" Compact SDS Rotary Hammer Kit 0756-20 M28 1" Compact SDS Rotary Hammer Tool Only







M28[™] LI-ION CORDLESS



Lithium-lon **Wood Cutting Circular Saw**

- · Lightweight aircraft aluminum shoe and magnesium upper and lower Guards reduce fatigue and are rugged enough for the job site.
- 50° bevel capacity easily adjusts for a wide range of cuts.
- Electric brake stops blade in less than 2 seconds for fast, repetitive cuts..
- Comfortable, Non-Slip Soft-Grip reduces vibration and fatigue.
- Available in **KIT** or **TOOL ONLY** (Includes 1-24T Blade, Wrench & Rip Fence).
- KIT Includes 1-24T Blade, Wrench, Rip Fence, (2) batteries, 1 hour charger and impact-resistant case.

Specifications

28 V DC / 3.0 Amp-Hrs. Volts:

Blade Size: 61/4" No Load RPM: 4,200

Weight: 8.9 lbs. w/battery 7.1 lbs w/o battery

Part No. Description

0730-22 M28 6-1/4" Circular Saw Kit

0730-20 M28 6-1/4" Circular Saw Tool

Only



Lithium-Ion **Metal Cutting Circular Saw**

- Lightweight aircraft aluminum shoe and magnesium upper and lower Guards reduce fatigue and are rugged enough for the job site.
- Large, impact-resistant window for clear line of sight.
- Electric brake for quick blade stops.
- LED light for greater cutting visibility.
- Comfortable, Non-Slip Soft-Grip reduces vibration and fatigue.
- Available in KIT or TOOL ONLY (Includes 1-36T Blade, Wrench, Rip Fence & Safety Glasses).
- KIT Includes 1-36T Blade, Wrench, Rip Fence, Safety Glasses, (2) batteries, 1 hour charger and impact-resistant case.

Specifications

Volts: 28 V DC / 3.0 Amp-Hrs.

Blade Size: 61/4" No Load RPM: 4,200

8.9 lbs. w/battery Weight: 7.1 lbs w/o battery

Part No. Description

0740-22 M28 61/4" Circular Saw Kit 0740-20 M28 61/4" Circular Saw Tool

Only



Lithium-Ion Portable Deep **Cut Band Saw**

- Over 200 cuts of 1" conduit per battery charge.
- Deep 43/4" x 43/4" cutting capacity. Cuts as fast as the corded version.
- High/Low speed selector switch with lock.
- Two-finger trigger speed control.
- Blade tightening Lever provides quick and easy blade changes.
- LED light for greater cutting visibility. • Comfortable, Non-Slip Soft-Grip reduces
- vibration and fatigue. • Available in KIT or TOOL ONLY (Includes 1-14TPI Blade).
- KIT Includes 1-14TPI Blade, (1) battery, 1 hour charger and impact-resistant case

Specifications

28 V DC / 3.0 Amp-Hrs. Volts: No Load SFPM: High 0-350 / Low 0-225 19.6 lbs. w/battery Weight: 17.3 lbs w/o battery

Part No. Description

M28 Band Saw Kit 0729-21

0729-20 M28 Band Saw Tool Only

Lithium-Ion **Grinder/Cut-Off Tool**

- 28V[™] motor delivers 8000 RPM no load speed
- Overload protection for preventing over-heating
- Soft start reduces start-up torque and improves gear life
- Large spindle lock for quick wheel replacement
- Tool free guard provides easy guard adjustment
- Slide on switch reduces user fatigue
- Fuel gauge indicates remaining run time
- Available in KIT or TOOL ONLY).
- KIT Includes (1) battery, 1 hour charger, spanner wrench, (1) Type 1 metal cut-off wheel, (1) Type 27 metal grinding wheel and contractor bag.



Specifications

28 V DC / 3.0 Amp-Hrs. Volts: No Load RPM: 0-1000 High / 0-400 Low Max Torque: 0-1081 in.-lbs. Low Gear

10.9 lbs. w/battery / 8.6 lbs w/o battery Weight:

Part No. Description 0725-21 M28 Grinder/Cut-Off Tool M28 Grinder/Cut-Off Tool Only 0725-20



252



Combination Kits





M Combination Kits

• Three M28 Tools or Four M28 Tools in one convenient pack!

4 Tool Combo Kit 0928-29

- 0719-20 V28[™] Sawzall[®] Recip Saw
- 0724-20 V28™ 1/2" Hammer Driver/Drill
- 0730-20 V28™ 61⁄2" Circular Saw
- 49-24-0185 V28™ Work Light
- Also Includes: (2) V28™ Battery Packs, Clip-Lok[™] System, Side Handle, #2 Phillips Bit, 61/2" 24T Carbide-tipped Blade, Rip Fence, 2-Pack Sawzall® Blades, 1-Hour Lithium-Ion Charger and Contractor's Bag.

Part No. Description

0928-29 M28 4-Tool Combo Kit Kit

3 Tool Combo Kit 0928-23

- 0719-20 V28[™] Sawzall[®] Recip Saw
- 0724-20 V28™ 1/2" Hammer Driver/Drill
- 49-24-0185 V28™ Work Light
- Also Includes: (2) V28™ Battery Packs, Clip-Lok™ System, Side Handle, #2 Phillips Bit, 2-Pack Sawzall® Blades, 1-Hour Lithium-Ion Charger and Contractor's Bag.

Part No. Description

0928-23 M28 3-Tool Combo Kit



Accessories



28V Li-Ion Battery Pack

- Delivers 2x the run-time vs. 18V NiCad batteries.
- · No memory effect irregardless of the pack's current charge level.
- Lighter weight than 18V NiCd & NiMH packs.
- Provides up to 21/2 times more lifetime work output when compared today's 18V NiCd.
- · Battery fuel gauge indicates how much charge is left in battery.
- Fade-free power, V28 Li-Ion batteries maintain their power level throughout their entire discharge cycle.

Specifications

Voltage: 28 V DC, 3.0 Amp-hr Compatible With: Milwaukee V28 Tools 2.4 lbs. Weight:

Part No. Description

48-11-2830 M28 Replacement Bat-



Universal Li-Ion/Ni-Cad 18V & 28V Charger

• Compatable with ALL Milwaukee 18-28V Li-Ion/NiCad Batteries.

Part No.

Description

48-59-2818 M28 Universal Li-Ion/Ni-Cad 18V/28V Charger



M¹⁸ Jobsite **Radio**

- AM/FM Tuner with Digital Processor
- Premium speakers and 40 watt amplifier
- Weather sealed auxiliary compartment Protects MP3 players and other audio devices
- ABS polymer and steel construction
- Equalizer and 10-station presets
- AC/DC Versatility Powered by Milwau-kee M12[™], M18[™], V18[™], M28[™], NiCd 12V to 28V, and AC outlet
- Built-in bottle opener
- 12V DC Output Charges most small electronic devices

Part No. Description 2790-20 M18 Jobsite Radio



Multi-Bay Charger for All Slide-On Nicd, V18/V28 Li-Ion Batteries

- · Smart charger for use with Milwaukee V28 LITHIUM-ION, V18 LITHIUM-ION and NiCd batteries.
- Convenient built-in cord wrap also acts as shock absorber.
- High visibility LED for charge status indication.

Part No. Description

48-59-0280 Multi-Bay Charger



Worklight

- Clip-Lok[™] system ready.
- 140° pivoting head.

Part No. Description

49-24-0185 M28 Li-Ion Work Light





TANKET LITHIUM ION NIMAN

NANO[™] Cordless Tool System

28V NANO™ LI-ION CORDLESS

Up to 50% More Runtime than 18V NiCad

• DeWalt's Heavy-Duty 28V NANO™ Phosphate Lithium Ion batteries delivers 50% more runtime vs. 18V NiCad batteries.

No Memory & Virtually No Self-Discharge

· For maximum productivity and less downtime.

ı	Part No.	Description
	DC9280 DC9000	28V NANO [™] Replacement Battery 28V-36V 1 Hour Charger

Lightweight Design

• 2.0 lbs, the same weight as DeWalt 14.4V NiCad batteries



2,000 Recharges



DEWALT 28V 6-1/2" Circular Saw Kit

- 6-1/2" carbide tipped blade for cutting common materials at 90° and 45°.
- 28V high performance battery pack provides long run-time and battery life.
- 3,850 RPM for fast rip cuts & cross cuts.
- 0-50° bevel capacity allows for aggressive bevel cuts for a multitude of applications.
- · High strength magnesium shoe and upper guard provides increased durability for long-term cut accuracy.
- Fan-cooled motor with replaceable brushes for maximum power and durability
- Anti-slip comfort grip for better control.
- KIT Includes (1) battery, 1 hour charger, 16T Carbide Saw Blade, Rip fence & impact-resistant case.

Specifications

28 V DC No Load Speed: 3850 rpm Blade Diameter: 6-1/2" 0-50° **Bevel Capacity:** Keyless Blade Clamp: Yes Weight: 8.0 lbs.

Part No. Description

DC310K 28V 6-1/2" Circular Saw Kit



DEWALT 28V Recirocating Saw Kit

- 1-1/8" stroke length and 0-3,000 spm for fast cutting.
- 28V high performance battery pack provides long run-time and battery life.
- 4-position keyless blade clamp allows quick blade change, flush cutting, and versatility.
- 3-position adjustable shoe for adjusting depth of cut and extends blade life.
- DeWalt built high power, and high efficiency motor with electric brake powers through the toughest applications
- Anti-slip comfort grip for better control.
- KIT Includes (1) battery, 1 hour charger, reciprocating saw blade & impact-resistant case.

Specifications

Volts: 28 V DC Strokes per Minute: 0-3,000 spm Stroke Length: 1-1/8" Electric Brake: Yes Keyless Blade Clamp: Yes Weight: 8.0 lbs.

Part No. Description

DC315K 28V Reciprocating Saw Kit



DEWALT 28V 1/2" Hammerdrill/ **Drill/Driver Kit**

- DEWALT® built high power, high efficiency motor for superior performance in all drilling and fastening applications.
- 28V high performance battery pack provides long run-time and battery life.
- Patented 3-speed all-metal transmission for optimal performance.
- Heavy-duty 1/2" self-tightening chuck tightens throughout operation providing superior bit gripping strength.
- Anti-Slip comfort grip provides increased comfort and control.
- KIT Includes (2) batteries, 1 hour charger, 360° side handle & impact-resistant case.

Specifications

28 V DC

Max. Power: 650 UWO # of Speed Settings: 3 Max RPM: 0-400/0-1,200/ 0-1.600 Max BPM 0-6,800/0-20,400 0-27,200

Clutch Settings: 22 Weight: 6.9 lbs.

Part No. Description

DC910KL 28V 1/2" Hammerdrill/Drill/

Driver Kit



Volts:

NANO[™] Cordless Tool System





DEWALT 28V 1/2" Torque Impact Wrench Kit

- · Heavy-duty impact mechanism delivers superior torque for heavy-duty applications.
- Heavy-duty all-metal anvil provides durability and prevents shearing.
- High speed all-metal transmission delivers 2,400 rpm for increased productivity.
- · High power, high efficiency motor delivers maximum performance in all fastening applications.
- · Variable speed reversible switch provides full-range control for both setting and removing fasteners.
- · Electric brake allows for precise setting of fasteners
- DeWalt exclusive NANO[™]-phosphate lithium ion cells offer long battery life & durability.
- Anti-slip comfort grip provides increased comfort and control.
- KIT Includes (2) batteries, 1 hour charger & impact-resistant case.

Specifications

Volts: 28 V DC No Load Speed: 2,400 RPM Impacts per Minute: 3,000 BPM Max Torque: 1,920 in.-lbs. 160 ft.-lbs. Weight: 5.0 lbs.

Part No. Description

DC810KL 28V 1/2" Impact Wrench Kit



DEWALT 28V 1" SDS Rotary Hammer Kit

- SHOCKS™ Active Vibration Control significantly reduces vibration δ increases user comfort & productivity.
- Optimally balanced compact L-shape design allows access in tight spaces.
- 2.0 ft-lbs impact energy provides corded power without the cord.
- DEWALT® built high torque, high efficiency motor delivers maximum performance in all drilling applications.
- 28V high performance battery pack provides long run-time & battery life.
- Variable speed, reversing switch delivers versatility in all applications.
- Factory-set clutch reduces sudden, high torque reactions if bit jams.
- Electro-pneumatic hammer mechanism for fast penetration & low vibration.
- 360° side handle for better control & ease of use in tight spaces.
- KIT Includes (2) batteries, 1 hour charger, 360° side handle, depth rod & impact-resistant case.

Specifications

Volts: 28 V DC 0-1,150 RPM No Load Speed: Blows per Minute: 0-4,400 BPM Weight: 7.6 lbs.

Part No. Description

DC228KL 28V 1" SDS Rotary Hammer Kit



DEWALT 28V Jig Saw Kit

- All-metal, lever-action keyless blade change allows for quick & easy blade changes.
- All-metal keyless shoe bevel with detents at 0°, 15°, 30° and 45° provides versatility for easy bevel cutting.
- 4-position orbital action provides control of aggressiveness of cut and speed.
- Adjustable dust blower keeps line of cut clear of chips.
- 28V high performance battery pack provides long run-time & battery life.
- · Anti-slip comfort grip provides increased comfort and control.
- KIT Includes (1) battery, 1 hour charger, (1) jig saw blade & impact-resistant case.

Specifications

Volts: 28 V DC Strokes per Minute: 0-2,700 SPM

Stroke Length: Electric Brake: Yes Weight: 7.2 lbs.

Part No. Description

DC318K 28V Jig Saw Kit

DEWALT 28V 41/2" Cut-Off Tool Kit



- · Convenient trigger switch with lock-off button for easier gripping.
- 2 Position side handle offers greater comfort and control.
- Quick-change wheel release provides easier and quicker wheel removal without the need for a wrench.
- · Jam-pot, low profile gear case provides precise gear alignment for a smoother, quieter transmission while allowing access to tight spaces.
- KIT Includes (2) batteries, 1 hour charger, (1) Type 27 Guard, (1) Type 1 Guard, Wrench, Matched Flanges, Type 27 Grinding Wheel, Type 1 Cutting Wheel, side handle & impact-resistant case.

Specifications

Volts: 28 V DC No Load Speed: 6,500 RPM Spindle Thread: 5/8"-11

Wheel Selection: Above 10,000 RPM

Weight: 7.2 lbs.

Part No. Description

DC413KL 28V 41/2"cut-Off Tool Kit



254



RENTALS

28V LI-ION CORDLESS

DEWALT

Combination Kits with NANO™ Technology





DEWALT Combination Kits with NANO™ Technology

• Two 28V Tools or Four 28V Tools in one convenient pack! Three kits to choose from.

4 Tool Combo Kit DCX5401

- DC315K Reciprocating Saw
- DC910KL 1/2" HammerDrill/Drill/Driver
- DC310K 61/2" Circular Saw
- DC599 Flexible Floodlight
- Also Includes: (2) 28V Battery Packs, 360° Side Handle, #2 Phillips Bit, 61/2" Carbide-tipped Saw Blade, rip fence, reciprocating saw blade, 1-Hour Charger & Kit Box.

Part No. Description

DCX5401 28V - 4 Tool Combo Kit

2 Tool Combo Kit DCX5200

- DC910KL 1/2" HammerDrill/Drill/Driver
- DC310K 61/2" Circular Saw
- Also Includes: (2) 28V Battery Packs, 360° Side Handle, 61/2" Carbide-tipped saw blade, rip fence, 1-Hour Charger & Contractor's Bag.

Part No. Description

DCX5200 28V - 2 Tool Combo Kit

2 Tool Combo Kit DCX5210

- DC910KL 1/2" HammerDrill/Drill/Driver
- DC305 Reciprocating Saw
- Also Includes: (2) 28V Battery Packs, 360° Side Handle, reciprocating saw blade, 1-Hour Charger & Contractor's Bag.

Part No. Description

DCX5210 28V - 2 Tool Combo Kit



DEWALT 28V Battery Pack with NANO™ Technology

- Provides high power for corded performance
- Up to 50% more run-time vs. 18V NiCad batteries.
- Offers long-life and durability 2000 recharges
- Lightweight design 2.0 lbs, the same as DeWalt 14.4V NiCd battery
- Battery fuel gauge indicates how much charge is left in battery.
- · No memory and virtually no self-discharge.

Specifications

28 V DC Voltage:

Entire line of DeWalt Compatible With:

28V Tools

Weight: 2.0 lbs.

Part No. Description

DC9280 28V Battery Pack w/NANO™

Technology



Accessories



DEWALT 28V - 36V 1 Hour Charger

- 1-Hr Charging for minimal downtime.
- 3-Stage charging system provides maximum run-time and extends overall life of battery.
- · Battery fuel gauge indicates how much charge is left in battery.
- Cord wrap for improved cord storage.

Specifications

Voltage: 28 - 36 V DC

Bulb: Xenon

Compatible With: 28-36V DeWalt

Battery Packs

Weight: 1.9 lbs.

Part No.

DC9000 28V-36V Battery Charger

Description



DEWALT 36V & 28V Floodlight

- Flex neck design with lockable head clips allow for hands free use and versatility to stand or hang light.
- Wide angle beam of light provides more light than a conventional flashlight.
- Xenon bulb provides extra bright beam of light.
- 8 hours run-time on a single charge.

Specifications

Volts: 28V & 36 V DC Bulb: Xenon Run-Time: 8 hours Weight: 1.14 lbs.

Part No. Description

DC509 36V Floodlight DC519 28V Floodlight

18V LI-ION CORDLESS





Increased Run-Time

 Milwaukee's 18 volt, M18 XC High Capacity Lithium-Ion battery features increased runtime with 40% less weight than an 18V NiCd battery.


No Memory Effect

 M18 batteries can be recharged at any time without creating a memory effect, regardless of the pack's current charge level

Milwaukee Digital Power Management

- Overload Protection Prevents user from damaging their cordless power tool investment in abusive situations.
- Temperature Management System Keeps battery in ideal temperature range to provide maximum life.
- Individual Cell Voltage Monitoring Ensures optimal charge and discharge for maximum life.
- **Discharge Protection** Prevents cell damage from over-discharge



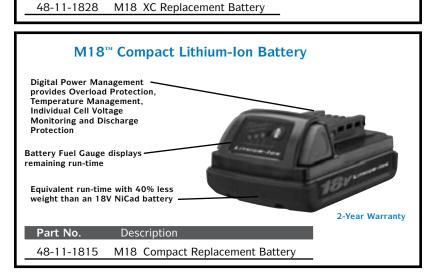



18V Li-Ion 1/2" Hammer Drill/Driver

- 4-Pole frameless motor: Delivers 550 in-lbs of peak torque, 0-450/0-1,700 RPM, & 29,000 BPM.
- Compact & Ergonomic Design: 8-1/2" Length.
- DPM Digital Power Management: Overload protection prevents damage to the tool and battery in abusive situations.
- All Metal Gear Case: The only metal gear case in its class.
- All Metal 1/2" Single Sleeve Ratcheting Chuck: Provides maximum durability and bit retention
- Available in KIT or TOOL ONLY.
- KIT Includes (2) batteries (available with either High Capacity XC or Compact Li-Ion batteries, 1 hour charger, and Kitbox.

Specifications

Volts: 18 Volts DC
No Load RPM: 0-450 / 0-1700
No Load BPM: 0-29,000
Torque: 550 in-lbs.

Weight: 4.9 lbs. w/battery / 4.4 lbs w/o battery

Part No. Description

2602-22 M18 1/2" Hammer Drill/Driver Kit w/ XC Battery
2602-22CT M18 1/2" Hammer Drill/Driver Kit w/ Compact Battery

2602-20 M18 1/2" Hammer Drill/Driver, Tool Only



2610-24

2601-22



18V Li-Ion 1/2" Hammer Drill/Driver

- Milwaukee 4-Pole Frameless Motor maximizes tool efficiency to increase run-time
- 1/2" single-sleeve ratcheting metal chuck with carbide jaws
- On-board Battery Fuel Gauge displays remaining run-time
- Built-in LED Light illuminates work surface
- Variable speed trigger
- Available in KIT or TOOL ONLY.

• KIT Includes (2) XC batteries, 1 hour charger, side handle and carrying case.

Specifications

Volts: 18 Volts DC No Load RPM: 0-450 / 0-1800 No Load BPM: 0-28.000 Torque: 650 in-lbs. Weight: 5.3 lbs. w/battery

Part No. Description

2611-24 M18 High Performance 1/2" Hammer Drill/Driver Kit

2611-20 M18 High Performance 1/2" Hammer Drill/Driver, Tool Only



M¹⁸ 18V Li-Ion 1/2" Drill/Driver

- Milwaukee 4-Pole Frameless Motor maximizes tool efficiency to increase run-time
- 1/2" single-sleeve ratcheting metal chuck with carbide jaws
- On-board Battery Fuel Gauge displays remaining run-time
- Built-in LED Light illuminates work surface
- Variable speed trigger
- Available in KIT or TOOL ONLY.

• KIT Includes (2) batteries, 1 hour charger, side handle and carrying case

Specifications

Volts: 18 Volts DC No Load RPM: 0-450 / 0-1800 No Load BPM: 0-28.000 Torque: 650 in-lbs. Clutch Settings: 24

Weight: 5.3 lbs. w/battery

Part No. Description

2610-24 M18 1/2" High PErformance Drill/Driver Kit

M18 1/2" High Performance Drill/Driver, Tool Only 2610-20



18V Li-Ion Compact 1/2" Driver Drill

- 1/2 in. Ratcheting Chuck with plastic sleeve
- Heavy-Duty 2-Speed Metal Gear Box: 0-350/0-1,400 rpm
- Compact Length (7-3/4 in.) fits in tight areas
- Compact Motor delivers 400 in.-lbs. of maximum torque
- Built-in LED light illuminates work surfaces
- Available in KIT or TOOL ONLY.

• KIT Includes (1) Compact battery, 1 hour charger, keyless chuck and carrying case.

Specifications

Volts: 18 Volts DC Clutch Settings: 21 No Load RPM: 0-350 / 0-1400 Capacity in Steel: 1/2" Capacity in Wood: No Load BPM: 0-28,000 1"

400 in-lbs. Weight: 4.0 lbs. w/battery Torque:

Part No. Description

2601-22 M18 1/2" Compact Driver Drill Kit

M18 1/2" Compact Driver Drill, Tool Only 2601-20









18V LI-ION CORDLESS



18V Li-Ion 3/4" High Torque Impact Wrench with Friction Ring

- Delivers 525 ft- lbs of torque
- · Compact Size/Light Weight: 9" length and 6.8 lbs
- 4-Pole frameless motor: Delivers maximum run-time
- 3/4" Anvil w/Friction Ring: Provides quick and easy, one-handed socket changes
- Available in KIT or TOOL ONLY.

• KIT Includes (2) XC batteries, 1 hour charger and kit box.

Specifications

18 Volts DC Anvil Size: 3/4" Square Volts: No Load RPM: 0-19,000 Friction Ring Anvil Type: No Load IPM: 0-2,200Weight: 6.7 lbs. w/battery Torque: 525 ft.-lbs.

Part No. Description

2664-22 M18 3/4" High Torque Impact Wrench Kit

2664-20 M18 3/4" High Torque Impact Wrench, Tool Only



18V Li-Ion 7/16" Hex High Torque Impact Wrench

- Delivers 350 ft- lbs of torque
- Compact Size/Light Weight: 9-1/2" length and 7 lbs
- 4-Pole frameless motor: Delivers maximum run-time
- 7/16" Hex Chuck: Provides quick and easy accessory changes
- Available in KIT or TOOL ONLY.

• KIT Includes (2) XC batteries, 1 hour charger and kit box.

Specifications

Anvil Size: 7/16" hex Volts: 18 Volts DC 0-19.000 No Load RPM: Anvil Type: hex Chuck No Load IPM: 0-2,200 Weight: 6.7 lbs. w/battery 350 ft.-lbs. Torque:

Part No. Description

M18 7/16" Hex High Torque Impact Wrench Kit 2665-22

2665-20 M18 7/16" Hex High Torque Impact Wrench, Tool Only





18V Li-Ion 1/2" High Torque Impact Wrench with Friction Ring

- Delivers 450 ft- lbs of torque
- Compact Size/Light Weight: 8-7/8" length and 6.7 lbs
- 4-Pole frameless motor: Delivers maximum run-time
- 1/2" Anvil w/Friction Ring: Provides quick and easy, one-handed socket changes
- Available in KIT or TOOL ONLY.

• KIT Includes (2) XC batteries, 1 hour charger and kit box

Specifications

Volts: 18 Volts DC Anvil Size: 1/2" Square No Load RPM: 0-19,000 Anvil Type: Friction Ring No Load IPM: 0-2,200 Weight: 6.7 lbs. w/battery 450 ft-lbs. Torque:

Part No. Description

2663-22 M18 1/2" High Torque Impact Wrench Kit

2663-20 M18 1/2" High Torque Impact Wrench, Tool Only



258



18V Li-Ion 1/2" High Torque Impact Wrench with Detent Pin

- Delivers 450 ft- lbs of torque
- Compact Size/Light Weight: 8-7/8" length and 6.7 lbs
- 4-Pole frameless motor: Delivers maximum run-time
- 1/2" Anvil w/Pin Detent: Provides maximum socket retention
- Available in KIT or TOOL ONLY.

• KIT Includes (2) XC batteries, 1 hour charger and kit box.

Specifications

1/2" Square Volts. 18 Volts DC Anvil Size: No Load RPM: 0-19,000 Anvil Type: Detent Pin 0-2,200 Weight: No Load IPM: 6.7 lbs. w/battery Torque: 450 ft-lbs.

Part No. Description

2662-22 M18 1/2" High Torque Impact Wrench Kit

2662-20 M18 1/2" High Torque Impact Wrench, Tool Only



18V Li-Ion Cordless 1/2" Compact Impact Wrench

- Milwaukee Designed Impact Mechanism: maximum application speed
- Milwaukee 4-Pole Frameless Motor: maximum efficiency and run-time
- 1/2" Detent Pin: provides positive bit retention
- Built-In LED Light: illuminates work surface
- Belt clip allows for easy portability.
- Available in KIT or TOOL ONLY.

• KIT Includes (2) 18V XC Li-lon batteries, 18V charger, belt clip & carrying case

Specifications

1/2" Anvil Size: Volts: 18 Volts DC No Load RPM: 0-2,200 Anvil Type: Detent Pin No Load IPM: 0 - 3,200Weight: 4.1 lbs. w/battery 2,200 in-lbs.

Torque: Part No. Description

2652-22 M18 1/2" Compact Impact Wrench Kit

M18 1/2" Compact Impact Wrench, Tool Only 2652-20



18V Li-Ion Cordless 3/8" Compact Impact Wrench

- Milwaukee Designed Impact Mechanism: maximum application speed
- Milwaukee 4-Pole Frameless Motor: maximum efficiency and run-time
- 3/8" Friction Ring: allows quick socket changes
- Built-In LED Light: illuminates work surface
- Belt clip allows for easy portability.
- Available in KIT or TOOL ONLY.

• KIT Includes (2) 18V XC Li-Ion batteries, 18V charger, belt clip & carrying case

Specifications

Anvil Size: Volts: 18 Volts DC No Load RPM: Friction Ring 0 - 2,200Anvil Type: No Load IPM: 0-3,200 Weight: 4.1 lbs. w/battery

Torque: 2,000 in-lbs.

Description

2651-22 M18 3/8" Compact Impact Wrench Kit

M18 3/8" Compact Impact Wrench, Tool Only 2651-20



Part No.



18V LI-ION CORDLESS





18V Li-Ion 1/4" Hex Compact Impact Driver

- 1/4" Hex quick change allows for easy bit changes.
- Milwaukee designed impact mechanism provides faster application speed.
- 4-Pole Frameless Motor maximizes tool efficiency to increase run-time.
- On-board battery fuel gauge displays remaining run-time.
- · Built-in LED Light illuminates work surface
- Variable speed trigger.
- Belt clip allows for easy portability.
- Also available with (2) 18V Li-Ion Compact Batteries

ullet KIT Includes (2) 18V XC Li-Ion batteries, 18V charger, belt clip, δ carrying case

Volts: 18 Volts DC Torque: 1400 in-lbs. No Load RPM: 0-2,200 Anvil Type: 1/4" Hex No Load IPM: 0-3,200 Weight: 3.5 lbs. w/battery

Part No. Description

26E0 21 M19 1// Hay Impact Driver Vit with Compact Botton	2650-22	50-22 M18 1/4" Hex Impact Driver Kit, with XC High Capacity Battery
2650-21 WITO 1/4 Hex Impact Driver Nit, with Compact Battery	2650-21	50-21 M18 1/4" Hex Impact Driver Kit, with Compact Battery

2650-20 M18 1/4" Hex Impact Driver, Tool Only



18V Li-Ion 4-1/2" Grinder/Cut-Off Tool

- 4-Pole Motor- Delivers maximum power when cutting or grinding
- Overload Protection Prevents damage to the tool and battery in abusive situations
- Debris Baffles Keeps debris from entering the tool and damaging the internal components to help increase tool life.
- Tool Free, Burst Resistant Guard Quick, easy guard adjustments.
- Paddle Switch Design The only cordless cut-off /grinder in the market with a paddle switch design
- Up to 35% faster cutting speed
- Up to 50% more cuts on a single charge
- 3-Position Side Handle Provides optimal control and versatility
- KIT Includes (2) 18V XC Li-Ion batteries, 18V charger, Type 1 Guard, Type 27 Guard, Type 1 Cut-Off wheel, Spanner Wrench, Side handle & Contractor bag.

Specifications

Volts: 18 Volts DC Spindle Lock: Yes RPM's: 9,000 Switch Type: Paddle

Handle Positions: 3 Weight: 5.9 lbs. w/battery

Part No. Description

2680-22 M18 4-1/2" Grinder / Cut-Off Tool Kit

2680-20 M18 4-1/2" Grinder / Cut-Off Tool, **Tool Only**



M¹⁸ 18V Li-lon Sawzall[®] Reciprocating Saw Kit

- Patented Gear-Protecting Clutch extends the life of the tool.
 - Lever Action QUIK-LOK[™] Blade Clamp.
- On-board battery fuel gauge displays remaining run-time.
- Built-in LED Light illuminates work surface
- Variable speed trigger.
- KIT Includes (2) 18V XC Li-lon batteries, 18V charger, (1) General Purpose Sawzall® blade, & carrying case.

Specifications

Volts: 18 V DC Strokes per Minute: 0-3,200 SPM

Stroke Length: 1"
Overall Length: 17-3/4"
Tool Weight: 18.3 lbs.

Part No. Description

2620-22 M18 Sawzall® Recip Saw Kit

2620-20 M18 Sawzall® Recip Saw, Tool Only





18V Li-Ion Jig Saw Kit

- ullet Quik-Lok $^{\scriptscriptstyle{\text{TM}}}$ blade clamp Provides fast and easy keyless blade change.
- Tool-free shoe bevel allows for a maximum 45° bevel in either direction with detents at 0°, 15°, 30°, and 45°.
- Position Orbital Cutting most versatility for application specific cutting than any cordless jig saw on the market.
- · Over-Molded Grip with variable speed trigger
- Non-Marring Shoe
- KIT Includes (2) 18V XC Li-Ion batteries. 18V charger, Jig-saw blade, non-marring shoe & carrying case.

Specifications

Volts: 18 V DC Strokes per minute: 2,200 SPM Stroke length:

Bevel Capacity: 45 degree **Orbital Settings:**

Tool Weight: 7.75 lbs.

2645-22 M18 Jig Saw Kit

Part No.

2645-20 M18 Jig Saw, Tool Only

Description



M¹⁸ 18V Li-lon 6-1/2" Circular Saw Kit

- Heavy-Duty Magnesium Guards for maximum durability.
- Ergonomic, compact and lightweight design with soft-grip handle for operator comfort.
- · Electronic brake stops blade quickly.
- · On-board battery fuel gauge displays remaining run-time.
- · Aircraft aluminum shoe provides greater accuracy.
- KIT Includes (2) 18V XC Li-Ion batteries, 18V charger & contractor bag.

Specifications

Volts: 18 V DC Speed: 3,500 RPM 2-1/8" @ 90°, Capacity: 1-5/8" @ 45° Arbor: 5/8" Blade: 6-1/2" 24T Carbide Tipped Trigger: Lock-off Tool Weight: 8.5 lbs.

Part No. Description

2630-22 M18 6-1/2" Circular Saw Kit 2630-20 M18 6-1/2" Circular Saw,

Tool Only

Milwaukee





18V LI-ION CORDLESS

18V Li-Ion Compact **Bandsaw Kit**

- 45% Lighter than Deep Cut 10.25 Lbs compact light weight design for cutting overhead and in tight places.
- 3-1/4" Cut Capacity cuts most common materials for Electrician, Plumber and Mechanical cutting applications. Single pass cut on 3" copper, 3" angle iron, 2-1/2" conduit.
- Tool-Free Adjustable Material Shoe quickly adjusts the shoe and allows flush cuts when working with installed materials against walls and ceilings.
- LED Work Light illuminates the cut line in dark areas.
- Blade Ejection System Quickly change the blade by moving the material guide into the up position and depressing the blade ejection button.
- Drop Resistant Pulley Guard -Engineered geometries & high impact polymer.
- Cast Aluminum Gear Case Withstands jobsite abuse & maintains gear positioning.
- KIT Includes (2) 18V XC Li-lon batteries, 18V charger, Blade, & case.

Specifications

Volts: 18 V DC SFPM: 480 No Load Speed 480 Loaded Speed 390 3-1/4" Max Capacity: Blade Length: 35-3/8" Tool Weight: 10.25 lbs.

Part No. Description

2629-22 M18 Compact Band Saw Kit 2629-20 M18 Compact Band Saw, Tool Only

18V Li-Ion Wet/Dry Vacuum

- Works on all Milwaukee 18V slide-on batteries, LITHIUM-ION or NiCd
- Powerful motor to provide strong suction and air flow
- Tool box style easy transport and storage
- · Reusable wet/dry filter for both wet and dry applications
- KIT Includes Filter Assembly, Crevice Tool, Wide Utility Nozzle, Wireless Vinyl Hose, Battery Pack & Charger NOT INCLUDED.



Specifications

Volts: 18 V DC Material: Wet or Dry 2 Gallon Capacity: Max Air Flow: 45 cu. ft./min Sealed Suction in Water: 32 in. Tool Weight: 9.4 lbs.

Part No. Description

0880-20 18V Wet/Dry Vacuum Kit

262

18V LI-ION CORDLESS





Combination Kits

	2-Tools	2-Tools	2-Tools	3-Tools	3-Tools	4-Tools	4-Tools	4-Tools	4-Tools
KIT COMPONENTS	2690-22	2691-22	2693-22	2691-23	2696-23	2690-24	2691-24	2692-24	2694-24
2601-20 M18 1/2" Compact Drill Driver									
2602-20 M18 1/2" Hammer Drill Driver									
2611-20 M18 High Performance Hammer Drill-Driver (Includes Side-Handle)									
2620-20 M18 SAWZALL® Recip Saw (Incl. G.P. SAWZALL® Blade)									
2630-20 M18 6-1/2" Circular Saw (Includes 6-1/2" Blade & Rip Fence)									
2650-20 M18 1/4" Hex Compact Impact Driver									
2651-20 M18 3/4" Compact Impact Wrench									
2663-20 M18 1/2" High Torque Impact Wrench									
49-24-0171 M18 Work Light									
ACCESSORIES INCLUDED:									
(2) 48-11-1828 M18 XC High Capacity Lithium-lon Batteries									
(2) 48-11-1815 M18 Compact Lithium-lon Batteries									
48-59-1801 1-Hour Charger									
Contractor Bag									
Carrying Case									



263



M¹⁸ Jobsite Radio

- AM/FM Tuner with Digital Processor -Delivers highest reception accuracy and signal clarity
- Premium speakers and 40 watt amplifier
- Weather sealed auxiliary compartment - Protects MP3 players and other audio devices
- Shock absorbing ABS polymer and steel construction protects against weather and abusive job site conditions
- Equalizer and 10-station presets
- AC/DC Versatility Powered by Milwau-kee M12[™], M18[™], V18[™], V28[®], NiCd 12V to 28V, and AC outlet
- Built-in bottle opener
- 12V DC Output Provides power to charge most small electronic devices

Part No. Description

2790-20 M18 Jobsite Radio



M¹⁸ 18V Li-Ion LED Worklight

- Ergonomic, compact, and lightweight design for operator comfort
- Fold-away utility hook
- 135 degree rotating head

Part No. Description

2735-20 M18 LED Worklight

Accessories



18V Compact Li-Ion Battery

- Equivalent run-time with 40% less weight than an 18V NiCad battery
- Milwaukee Digital Power Management Overload Protection - Prevents user from damaging their cordless power tool investment in abusive situations
- Temperature Management System -Keeps battery in ideal temperature range to provide maximum life
- Individual Cell Voltage Monitoring -Ensures optimal charge and discharge for maximum life
- Discharge Protection Prevents cell damage from over-discharge
- Battery Fuel Gauge Displays remaining run-time
- · 2-year Warranty

Part No. Description

48-11-1815 M18 18V Compact Lithium-Ion Battery



18V Li-Ion Worklight

- · Ergonomic, compact, and lightweight design for operator comfort
- Fold-away utility hook
- 135 degree rotating head

Part No. Description 49-24-0171 M18 Worklight







M₁₈ 18V XC High Capacity **Li-Ion Battery**

- Increased run-time with 40% less weight than an 18V NiCd battery
- Milwaukee Digital Power Management Overload Protection - Prevents user from damaging their cordless power tool investment in abusive situations
- Temperature Management System -Keeps battery in ideal temperature range to provide maximum life
- Individual Cell Voltage Monitoring -Ensures optimal charge and discharge for maximum life
- Discharge Protection Prevents cell damage from over-discharge
- · Battery Fuel Gauge Displays remaining run-time
- 5-year 2,000 Charge Warranty

Part No. Description

48-11-1828 M18 18V XC High Capacity Lithium-Ion Battery



18V Li-Ion Battery Charger

- 1-Hour Charger
- · Pass-through plug design for added outlet availability
- 5-Year Warranty

Part No. Description

48-59-1801 M18 18V Lithium-Ion Battery Charger

M18 AC/DC Wall & Vehicle 2710-20 18V Lithium-Ion Battery Charger



RENTALS

Li-Ion Cordless Tool Systems







DEWALT 18V XRP™ 1/2" Hammerdrill/Drill/Driver Kit

- Patented 3-speed, all-metal transmission.
- Heavy-duty 1/2" self-tightening chuck.
- LED worklight provides better visibility.
- · Best in class length for improved balance and better control
- KIT Includes (2) batteries, 1 hour charger, 360° side handle & hard case.

Specifications

Volts: 18 V DC Max. Power: 425 UWO

of Speed Settings: 3

Max RPM: 0-500/0-1,250/ 0-2.000

Max BPM 0-8,500/0-21,250

0-24,000 Clutch Settings: 22 Weight: 5.25 lbs.

Part No. Description

DCD970KL 18V 1/2" Hammerdrill/Drill/

Driver Kit



DEWALT 18V XRP™ 1/2" Hammerdrill/Drill/Driver Kit

- Patented 3-speed, all-metal transmission.
- Heavy-duty 1/2" self-tightening chuck.
- · LED worklight provides better visibility.
- · Best in class length for improved balance and better control
- KIT Includes (2) batteries, 1 hour charger, 360° side handle & hard case.

Specifications

Volts: 18 V DC Max. Power: 450 UWO

of Speed Settings: 3

Max RPM: 0-500/0-1,250/ 0 - 2.000

Max BPM 0-8,500/0-21,250 0-34,000

Clutch Settings: 22 Weight: 6.25 lbs.

Part No. Description

DCD950KX 18V 1/2" Hammerdrill/Drill/

Driver Kit DCD950B Bare Tool Only



DEWALT 18V Compact 1/2" Hammerdrill Kit

- · Lightweight design minimizes user fatigue
- Dual speed range 0-500/0-1700 rpm and 0-8,500/0-29,000 bpm
- Compact Li-Ion batteries (DC9181) are compatible with the existing system of **DEWALT 18V power tools**
- LED worklight provides increased visibility in confined spaces
- KIT Includes (2) Compact batteries, 30 minute charger, & hard case.

Specifications

18 V DC Volts: Max. Power: 350 UWO # of Speed Settings:

0-500/0-1,700/ Max RPM: Max BPM 0-8,500/0-29,000

Clutch Settings: 17 Weight: 4.1 lbs.

Part No. Description

DCD775KL 18V 1/2" Hammerdrill Kit DCD775B Bare Tool Only



Li-Ion Cordless Tool Systems

RENTALS



DEWALT 18V Compact 1/2" Drill/Driver Kit

- · Lightweight design minimizes user fatigue
- Dual speed range 0-500/0-1700 rpm and 0-8,500/0-29,000 bpm
- Compact Li-Ion batteries are compatible with all DeWalt 18V power tools
- LED worklight provides increased visibility
- Compact size fits into tight spaces
- KIT Includes (2) Compact batteries, 30 minute charger, & hard case.

Specifications

Volts: 18 V DC Max. Power: 350 UWO

of Speed Settings: 2

Max RPM: 0-500/0-1,700/ Max BPM 0-8,500/0-29,000

Clutch Settings: 17 4 lbs. Weight:

Part No. Description

DCD760KL 18V 1/2" Drill Driver Kit DCD760B Bare Tool Only

TANK LITHIUM ION MEANS



DEWALT 18V XRP™ 1/2" Drill/Driver Kit

- Patented 3-speed all-metal transmission
- Heavy-duty 1/2" ratcheting chuck
- LED worklight provides increased visibility
- High power, high efficiency motor delivers 450 unit watts out of max power
- · Improved balance and better control
- KIT Includes (2) batteries, 1 hour charger, 360° side handle & hard case.

Specifications

Volts: 18 V DC Max. Power: 350 UWO

of Speed Settings:

Max RPM: 0-500/0-1,700/ Max BPM 0-8,500/0-29,000

Clutch Settings: 17 Weight: 4.1 lbs.

Part No. Description

DCD960KL 18V 1/2" Drill/Driver Kit

18 =

DEWALT 18V XRP™ Compact 1/4" Impact Driver

- · Frameless motor for extended tool durability and life
- · Replaceable brushes.
- Textured anti-slip comfort grip
- Durable magnesium gear case and all metal transmission.
- · Heavy-duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) compact Li-lon batteries, 30 minute charger & hard case

Specifications

18 V DC Volts: No Load Speed: 0-2,400 rpm Impacts/Min: 0-2,700 ipm Max. Torque: 1,330 in.-lbs. Weight: 3.1 lbs.

Part No. Description

DCF826KL 18V XRP[™] Compact Li-Ion 1/4" Impact Driver

DEWALT 18V XRP™ 1/2" Impact Wrench Kit

- Frameless motor for extended tool durability and life
- · Durable magnesium gear case and all metal transmission
- Compact size & weight.
- Replaceable brushes for increased serviceability
- Textured anti-slip comfort grip.
- Heavy duty impacting mechanism directs torque to fastener without kickback
- · KIT Includes (2) batteries, 1 hour charger & hard case.

Specifications

18 V DC Volts: 2,400 RPM No Load Speed: Impacts per Minute: 2,700 IPM Max Torque: 1,740 in.-lbs.

145 ft.-lbs 3.7 lbs.



Part No. Description

DC822KL 18V Li-Ion Cordless XRP™ 1/2" Impact Wrench Kit

DEWALT 18V XRP™ 1/4" Impact Driver Kit

- Compact size & weight.
- Textured ant-slip comfort grip.
- · Durable magnesium gear case and all metal transmission.
- DeWalt exclusive NANO[™]phosphate lithium ion cells offer long battery life & durability.
- KIT Includes (2) batteries, 1 hour charger & hard case.

Specifications

18 V DC 2,400 RPM No Load Speed: Impacts per Minute: 2,700 IPM Max Torque: 1,330 in.-lbs. 3.7 lbs. Weight:

Description Part No.

DC827KL 18V 1/4" Impact Driver Kit



Weight:

Li-Ion Cordless Tool Systems



DEWALT

18V XRP™ Li-Ion 41/2" Cut-Off Tool Kit

- 6,500 rpm provides high power for cutting and grinding applications
- Convenient trigger switch with lock-off button for easier gripping
- 2-position side handle offers greater comfort and control
- Quick-change wheel release provides easier and quicker wheel removal without the need for a wrench
- Jam-pot, low profile gear case provides precise gear alignment for a smoother, quieter transmission while allowing access to tight spaces
- KIT Includes (2) batteries, 1 hour charger, Type 27 & Type 1 guards, 2 matched flanges, wrench, Type 27 wheel, 2-position side handle δ contractors bag.

Specifications

18 V DC Volts: No Load Speed: 6,500 rpm Spindle Thread: 5/8"-11 Spindle Lock: Yes Min. Wheel RPM: 10,000 rpm Weight: 6.25 lbs.

Part No. Description

18V 41/2" Cut-Off Tool Kit DCG411KL DC411B

Bare Tool Only



DEWALT

18V XRP[™] Li-Ion Reciprocating Saw Kit

- 4-position blade clamp allows for flush cutting and increased versatility.
- Lever-action keyless blade clamp.
- Anti-slip comfort grip.
- Pivoting adjustable shoe with open top.
- Variable speed with trigger lock.
- KIT Includes (1) battery, 1 hr. charger, reciprocating saw blade δ hard case

Specifications

18 V DC Volts: Strokes/min: 0-3,000 spm Stroke length: 11/8" Electric Brake: Yes Weight: 7.25 lbs.

Part No. Description

DCS385L 18V XRP™ Li-Ion Reciprocating Saw Kit

DC385B Bare Tool Only



DEWALT

18V XRP™ Li-Ion 63/4" Metal Cutting Circular Saw Kit

- 63/4", 40-tooth carbide tipped blade cuts up to 2" conduit and pipe in one pass.
- All metal upper and lower guards for maximum durability.
- Multi-coated SIGHT-LINE[™] window for maximum abrasion resistance.
- Stainless-steel shoe stays rust free while minimizing chip build-up which prevents marring of the cutting surface.
- ULTRA SIGHT-LINE™ Scope allows maximum visibility to the cut line.
- KIT Includes (2) batteries, 1 hour charger, 40 tooth titanium carbide saw blade, & impact-resistant case.

Specifications

Volts: 18 V DC No Load Speed: 3,100 rpm Blade Diameter: 63/4" Bevel Capacity: N/A Arbor Size: 20mm Depth of Cut: 23/8" Weight: 8.5 lbs.

Part No. Description

DCS934KL 18V 63/4" Metal Cutting Circular Saw Kit DW934B Bare Tool Only

DEWALT 18V Nano™ Li-Ion **Battery**

- Compatible with all DeWalt 18V tools.
- No memory and virtually no selfdischarge.
- Lightweight design, 1.5 lbs., the same weight as DeWalt 12V NiCad batteries.

Part No. Description

DC9180 18V NANO™ Li-ion Battery DC9180C 18V Battery / 1 Hour Charger Combo Kit

18V Accessories

DEWALT Compact 18V Nano[™] Li-Ion **Battery**

- Compatible with all DeWalt 18V tools.
- No memory and virtually no self-discharge.
- Lightweight design, 1.5 lbs., the same weight as DeWalt 12V NiCad batteries.

Part No. Description

DC9181 Compact 18V NANO™ Li-ion **Battery**



DEWALT 7.2V - 18V NiCad/NiMH/

Li-Ion Charger

- Charges all DeWalt 7.2V - 18V Batteries
- 3-Stage Charging System.



Part No. Description 7.2V - 18V Battery Charger DC9180C 18V Battery / 1 Hour Charger

Combo Kit 7.2V - 18V Vehicle Battery DC9319

Charger





ANCHORS

STRUT

THREADED ROD

TOOLS

ABRASIVES

ONSITE SUPPLY

SAFETY

Combination Kits

DEWALT	LITHIUM JON	N BARE

		IDIIIa				17.11.15		
		2-Tools	2-Tools	2-Tools	2-Tools	4-Tools	4-Tools	6-Tools
KIT COMPONENTS		DCK 266L	DCK 265L	DCK 271L	DCK 275L	DCK 470L	DCK 475L	DCK 675L
	4000	200L	203L	ZIIL	273L	470L	473L	073L
DCD970 18V XRP™ Li-Ion	TI							
1/2" Hammerdrill / Drill / Driver	(17)							
DCD775 18V XRP™ Li-Ion								
Compact 1/2" Hammerdrill / Drill / Drive	r 🆺							
DCD760 18V XRP™ Li-Ion	46							
Compact 1/2" Drill / Driver	$\mathit{I\!$							
211117								
DCD827 18V XRP™ Li-Ion	T							
1/4" Impact Driver								
DCF826 18V XRP™ Li-Ion	-							
1/2" Impact Driver	4							
DC385 18V XRP™ Li-lon								
Reciprocating Saw								
Reciprocuting Saw	178 18							
DC411 18V XRP™ Li-lon								
4-1/2" Cut-Off Tool								
DW059 18V XRP™ Li-Ion	(m) (m)							
1/2" Impact Wrench	- 1							
DC390 18V XRP™ Li-Ion	Succession							
6-1/2" Circular Saw	5							
0-172 Circular Saw								
DW919 18V	Ω							
Flexible Floodlight								
ACCESSORIES INCLUDED:								
DC9180 18V XRP™ Li-lon								
Batteries (2)								
DC0191 19V VDDM Li Lau	ñ							
DC9181 18V XRP™ Li-lon Compact Batteries (2)								
Compact Batteries (2)	100							
DC9310 7.2V - 18V 60-Minute	-							
Li-Ion/NiCad/NiMH Charger								
DC931 7.2V - 18V 30-Minute								
Li-Ion/NiCad/NiMH Charger (Compact)	NAME OF TAXABLE PARTY.							
Contractor's Bag (Soft-Sided)								
Tool Case (Hard-Sided)								

RENTALS



Replace Your Hand Tools with Li-Ion Power!

Up To 65% Lighter vs. "compact" NiCad Batteries

Lightweight Design

Part No.

• Only 0.4 lbs. and 50% smaller than "compact" NiCad batteries.

No Memory & Virtually No Self-Discharge

• Longer run-time with fade-free power

Description

48-11-2401 12V M12 Replacement Battery 12V M12 XC High Capacity 48-11-2402

Replacement Battery

NEW XC High Capacity 12V Lithium-Ion

• 2X the Run-Time vs. Original M12 Battery

Compact

- 2-1/2" W x 3-1/2" L
- · Provides a durable and stable base for tools to stand upright.



48-11-2402



M¹² 12V Li-Ion 3/8" Drill Driver

- 2-Speed, all-metal gear box.
- Powerful motor, up to 25% more torque.
- Ratcheting single metal sleeve chuck for better bit retention.
- Lightweight & compact
- Built-in Fuel Gauge & LED for illumination.
- KIT Includes (2) Batteries, Charger and Carrying Case

2410-22 Specifications

Volts: 12 V DC No Load Speed (RPM): 0-400/0-1,500 Impacts per Minute: 0-3000 IPM Torque: 250 in.-lbs. Chuck Type: 3/8" Tool Length 7-3/8" Tool Weight (w/battery): 2.5 lbs.

Part No. Description

2410-22 12V Cordless Li-Ion 3/8" Drill Driver Kit 2410-20

3/8" Drill Driver, Bare Tool Only



M12 12V Li-Ion 1/4" Hex Impact Driver

- · Quick Bit-Loading for bit insertion and release with one hand.
- Battery Fuel Gauge displays remaining run-time.
- Built-in LED for illumination.
- Variable Speed Trigger
- KIT Includes (2) Batteries, Charger and impact-resistant Carrying Case

2450-22 Specifications

12 V DC 0-2000 RPM No Load Speed: 0-3000 IPM Impacts per Minute: Torque: 850 in.-lbs. Chuck Type: 1/4", Hex Tool Length 6-1/2" Tool Weight (w/battery): 2.3 lbs.

Part No. Description

2450-22 12V Cordless Li-Ion 1/4" Hex Impact Driver Kit 2450-20 1/4" Hex Impact Driver,

Bare Tool Only



M12 12V Li-Ion 3/8" Square **Drive Impact Wrench w/Ring**

- Powerful Impact Mechanism Up to 1,000 in.-lbs. of torque.
- Easy socket insertion/release.
- Lightweight & compact
- Built-in Fuel Gauge & LED for illumination.
- KIT Includes (2) Batteries, Charger and Carrying Case.

2451-22 Specifications

Volts: 12 V DC No Load Speed: 0-2,200 RPM Impacts per Minute: 0-3000 IPM 1000 in.-lbs. Torque: Anvil Type: 3/8" Square Tool Length 6-1/2" Tool Weight (w/battery): 2.3 lbs.

Part No. Description

2451-22 12V Cordless Li-Ion 3/8" Square Drive Impact Wrench w/Ring Kit 3/8" Square Drive Impact 2451-20 Wrench w/Ring Bare Tool Only



268

ANCHORS

THREADED ROD

ABRASIVES

RENTALS

12V Li-Ion **No-Hub Driver**

With specific torque settings for 60 and 80 in/lbs, the M12[™] Cordless No-Hub Driver is specifically designed to quickly install no-hub couplings with accuracy and repeatability. The 2455-22 can fasten up to 300 clamps on a single charge and is proven to be accurate for up to 25,000 clamps before re-calibration.



- Specific Torque Settings for 60 and 80 in-lbs - Fast accurate installation of no-hub couplings
- Auto Shut-Off w/ LED Indicator Alerts users that torque limit has been achieved
- LED Calibration Indicator Alerts user when calibration is needed (25,000 cycles)
- 0-750 RPM Drill Mode for general drilling and fastening
- Fastens up to 300 steel clamps on a single charge
- Compact/Lightweight Design
- Built-in Fuel Gauge & LED for illumination.

• KIT Includes (2) Batteries, Charger, (3) Shockwave Sockets, & Carrying Case.

2455-22 Specifications

Volts: 12 V DC

0-250 / 0-750 RPM No Load Speed: Torque: 60 in.-lbs. & 80 in-lbs.

Chuck Type: 1/4" Hex Tool Weight (w/battery): 2.75 lbs.

Part No. Description

2455-22 12V Cordless Li-Ion No-Hub Driver 2455-20 Screwdriver, Bare Tool Only



12V LI-ION CORDLESS

M¹² 12V Li-Ion Screwdriver

- Quick Bit-Loading 1/4 in. Hex Chuck for one-handed operation
- Metal Gear Housing for job site durability
- Variable Speed Trigger for output power control
- · Over-mold side and grip
- Built-in Fuel Gauge & LED for illumination.

• KIT Includes (2) Batteries, Charger, #2 Phillips 1/4" Hex Insert Bit, & Storage Bag.

2401-22 Specifications							
Volts:	12 V DC	Capacity in Steel:	1/4"				
No Load Speed:	0-500 RPM	Capacity in Wood:	1/2"				
Torque:	150 inlbs.	Tool Length	7"				
Chuck Type:	1/4" Hex	Tool Weight (w/battery)	: 2 lbs.				

Part No. Description

Clutch Settings:

2401-22 12V Cordless Li-Ion Screwdriver 2401-20 Screwdriver, Bare Tool Only



Replacement Copper Cutting Wheels

 Includes 2 replacement cutting wheels for the M12 12V Copper Tubing Cutter.

Part No. Description

48-38-0010 Replacement Copper Cutting Wheels, 2/pack

M12 12V Li-Ion Copper Tubing Cutter

14 + 1

- Close quarter rotating cutting head cuts pipe in confined spaces.
- Automatic adjustment from 3/8" 1" tubing.
- · Auto locking mechanism, Ultra-efficient drive mechanism delivers over 200 cuts per charge.
- · Water resistant metal cutter head.
- Ergonomic, compact, and lightweight design for operator comfort.
- Built-in Fuel Gauge & LED for illumination.

• KIT Includes (2) Batteries, Charger & Carrying Case

	2471-22 Specifications
Volts:	12 V DC
Trigger:	Cut, Reset to open
Speed:	500 RPM
Capacity:	1/2" - 1-1/8" O.D.
Blade:	Copper Cutting
Tool Length	14"

Part No. Description

Tool Weight (w/battery): 3.2 lbs.

2471-22 M12 Copper Tubing Cutter Kit, 2 Batteries 2471-21 M12 Copper Tubing Cutter Kit, 1 Battery Only 2471-20 M12 Copper Tubing Cutter, Tool Only



12V LI-ION CORDLESS







M12 12V Li-Ion Hackzall™ Reciprocating Saw

- Keyless QUIK-LOK™ Blade Clamp allows for quick and easy blade changes.
- · All-metal gear case for added durability.
- Accepts both HACKZALL™ and SAWZALL® style blades.
- Built-in Fuel Gauge & LED for illumination.
- Variable Speed Trigger
- KIT Includes (2) HACKZALL™ Blades, (2) Batteries, Charger and impact-resistant Carrying Case.

2420-22 Specifications

12 V DC Volts: No Load Speed: 0-3000 RPM

Stroke Length: 1/2"

Blade Clamp: Quik-Lok™ Universal 1/2" Tang

Trigger: Variable Speed

Tool Length 11" Tool Weight (w/battery): 2.6 lbs.

2420-22 12V Cordless Li-Ion M12 Hackzall™ Recip Saw Kit

2420-20 M12 HackzallTM Recip Saw, Tool Only

M¹² Hackzall[®] Reciprocating Saw Blades

Designed to maximize the cutting performance of the new M12 HACKZALLTM Reciprocating Saw, these blades feature a thin kerf design that reduces the amount of drag and resistance while cutting, resulting in more cuts per battery charge. Specialized blades are available for a variety of HVAC, electrical, plumbing and maintenance/repair applications. Includes 5 blades (except where noted).

and the same of th	Part No.	Application
Mil Transce 1	10.00 5100	F:1 1
	48-00-5400	Fiberglass
The state of the s		
	48-00-5460	Wood
	10 00 0 100	11000
was Thereton		
***************************************	48-00-5461	Plaster
Mil Santa	49 00 E410	Multi-Material
	48-00-5410	Multi-Material
I o		
Man Ber agreement	48-00-5310	Wood - Scroll
_		
	48-00-5324	Metal - Scroll
estander .		
Mar Samuel	48-00-5414	DVC /!!
	48-00-5414	PVC - 4"
1		
	48-00-5614	PVC - 6"
MAR SECTION 1 .		
	48-00-5424	Duct
and white the same of the same		
Made Transport	48-00-5418	ГМТ
	40-00-5418	EIVII

12V Li-Ion 3/8" Right Angle Drill Driver

- 3/8" Single sleeve Ratcheting Chuck
- 3-3/4" Head Length
- Extended Paddle Switch
- Electronic Clutch 11 Settings plus drill mode for complete control
- Built-in Fuel Gauge & LED for illumination.
- KIT Includes Battery, Charger, & Soft **Carrying Case**

Specifications

Volts: 12 V DC 0-800 RPM No Load Speed: Torque: 100 in.-lbs. Chuck Type: 3/8" Hex Clutch Settings: 11 + 1Head: 3-3/4" Tool Length 11.75" Tool Weight (w/battery): 2.43 lbs.

Part No. Description

2415-21 12V Li-Ion 3/8" Right Angel Drill Driver Kit

2415-20 12V Li-Ion 3/8" Right Angel Drill Driver, Bare Tool ONLY



12V Li-Ion PVC Shear

- Powerful Mechanism Cuts up to 2" schedule 40 PVC in 3 seconds
- Ultra Sharp Blade with Pierce Point - No burrs or shavings to
- 2470-21
- Offset Blade Cuts PVC / PEX in-wall, in-ground, or close to wall
- Quick Return Blade Increased productivity during repetitive cuts
- Stainless Steel Blade and Aluminum Jaw Impact, water and rust resistant
- Variable Speed Trigger Controlled cut in warm or cold weather

• KIT Includes Battery, Charger, & Carrying Case.

2470-21 Specifications						
Volts: Capacity: Torque: Trigger:	12 V DC 2-3/8" O.D. 1,900 inlbs. Variable	Blade: Tool Length Tool Weight (w/battery):	3mm S/S 14-3/8" 4.7 lbs.			

Description

2470-21 12V Li-Ion PVC Shear Kit

2470-20 12V Li-Ion PVC Shear, Bare Tool ONLY



Rechargeable Test and Measurement Instruments Milwaukee









M¹2 12V Li-Ion M-Spector™ **Digital Inspection Cameras**

- Crystal clear, 2.4" high-resolution, color display.
- Exclusive image zoom (2X) and LED brightness control.
- · Durable, detachable, 3' water-tight flexible cable and a small camera head fits through holes as small as 3/4".
- Extension camera cables available to extend reach of camera.
- One-handed operation.
- 15 hour run-time.
- Also available in 4-AA battery configuration or tool only
- KIT Includes 3' Camera Cable, Battery, **Charger and Carrying Case**

2310-22 Specifications

12 V DC Volts: LCD Display: 2.4" Hi-Res Color Camera Head Dia.: 0.7" (17mm) 2X Image Zoom:

LED Brightness Adjust: (3X) Control

Cable Length 3'

Part No. Description 2310-21 $M\text{-}Spector^{^{\text{\tiny TM}}} \ Digital \ Camera \ Kit$ M-Spector[™] Digital Camera Kit 2300-20 4-AA Batteries, (does not in-

clude 12V Battery or Charger)

2310 / 2300 Accessories

Part No. Description

48-53-0110 3' Camera Extension Cable 48-53-0140 8' Camera Extension Cable 48-53-0115 Replacement Camera Cable





12V Li-Ion M-Spector™ **AV Multimedia Inspection Cameras**

With the addition of picture, audio and video capabilities, professionals can now inspect and document issues, download the information to their computer and send visual confirmation to a customer or supervisor for review. Available with a 17 mm digital flexible camera cable (2311-21) for general applications or a 9.5 mm analog flexible camera cable (2312-21) for automotive applications.

FEATURES:

- 2GB Memory Card (included) records 90 minutes of audio/video or 7,600 photos
- USB Cable download files to a computer
- Integrated microphone and speaker
- Rotate both live and captured images
- 4X zoom, 4X LED brightness control, and auto-shut off
- 3' and 8' extension cables (Recommended maximum extension is 19')
- KIT Includes 3' Camera cable, 2GB Memory Card, USB Cable, Battery, Charger and Carrying Case

2311-21 Specifications

Volts: 12 V DC LCD Display: 3.5" Hi-Res Color Camera Head Dia.: 0.7" (17 mm) Adj. Image Zoom: 4X LED Brightness Adjust: (4X) Control

Part No. Description

Cable Length

2311-21 M-Spector[™] AV Multimedia Camera Kit (17 mm Cable) M-Spector[™] AV Multimedia 2312-21 Camera Kit (9.5 mm Cable)

2311 Accessories

Part No. Description

48-53-0110 3' Camera Extension Cable **48-53-0140** 8' Camera Extension Cable 48-53-0125 Replacement Camera Cable



M12

12V Li-Ion SUB-SCANNER™ **Detection Tool Kit**

A heavy duty pistol grip detection tool for professional, commercial and industrial applications. Detects rebar up to 6" deep in concrete, as well as the location and depth of materials beneath gypsum, OSB, ceramic tile and marble. Four wheel design for durability and smooth, accurate measurement.

FEATURES:

- Measures depth and location of rebar up to 6" through concrete
- Detects location of wood, PEX, PVC, and metal
- Differentiates between steel (ferrous) and copper or aluminum (non-ferrous) metals
- Embedded AC voltage detection to identify the location of live wires
- Intuitive user interface displays stud centers and edges
- High contrast white on black display and backlight for easy reading
- Rugged over-molding improves durability and user grip
- Auto-calibration for all surfaces
- KIT Includes Battery, Charger & **Carrying Case**

2290-21 Specifications

Volts: 12 V DC Detection depths of various materials: Wood/Metal Stud: 1-1/2 inches Plastic: 3 inches Ferrous Metal: 6" Non-Ferrous Metal: 6" Position Accuracy: Wood: 1/4" 1/2" Non-Ferrous: Ferrous: 1/2" Scan for AC Electrical: Yes Display Resolution: 0.5" Backlight: Yes Non-Contact Voltage: Yes

Part No. Description

Indication:

2290-21 **Detection Tool Kit** 2290-20 Detection Tool, Tool Only

Philadelphia, PA 610-647-8070



Visual (for NCVD)

THREADED ROD Milwaukee M1

Rechargeable Test and Measurement Instruments



12V Li-Ion Clamp Meters

A True-RMS current tester for professional commercial and industrial applications. The clamp meters feature an ergonomic pistol grip design greatly increasing comfort and ease-of-use in overhead applications. The units also provide wide 1.30 or 1.57" jaw openings to easily handle very large conductors, a thin jaw profile for access to tight spaces, a large white on black display, embedded non-contact voltage detection, and embedded extra bright LED floodlight.



12V Li-lon Thermometers

A heavy duty pistol grip infrared thermometer for professional, commercial and industrial applications. Powered by the Milwaukee M12 Lithium Ion battery, LASER-TEMP GUNS™ can safely measure temperatures between -22 to 1472° F with a 40:1 distance to spot ratio for even the most demanding industrial applications. Designed with embedded non-contact voltage detection and an extra bright LED Floodlight to increase end user productivity.

HVAC/R CLAMP-GUN™ Clamp Meter Kit 2238-21

- Large jaw size of 1.30" measuring up to 750 MCM cable
- CAT IV 600V / CAT III 1000V for greater safety
- Extra bright LED flood light and built-in voltage detection
- KIT Includes Battery, Charger, Test Lead Set, Thermocouple (Dual Banana), Carrying Case and Manual

00-00	
0038-01	Specifications

TRMS: YES Voltage AC/DC: 1000V Safety Rating: CAT IV 600V/ Contact Temp: -40° F to 1000°F CAT III 1000V Resistance: 600 kOhms Current AC: 600A LED Light: YES Microamps: 600µA

Part No. Description

2238-21 12V Li-Ion HVAC/R Clamp Meter Kit 2238-20 12V Li-Ion HVAC/R Clamp Meter, Bare Tool ONLY

CLAMP-GUN™ Clamp Meter Kit 2239-21

- Extra-large jaw size of 1.57" measuring up to 1000 MCM cable
- In-rush current measurement for motor starts
- Extra bright LED flood light and built-in voltage detection
- KIT Includes Battery, Charger, Test Lead Set, Carrying Case, and Manual

2239-21 Specifications

 TRMS:
 YES
 Voltage AC/DC:
 1000V

 Safety Rating:
 CAT IV 600V/ CAT III 1000V
 Contact Temp:
 -40° F to 1022°F

 In-Rush Current: 100mS
 LED Light:
 YES

Part No. Description

2239-21 12V Li-Ion Clamp Meter Kit

2239-20 12V Li-Ion Clamp Meter, Bare Tool ONLY

HVAC/R LASER-TEMP GUN™ Kit 2277-21

- Infrared surface temperature measurement from -22° F to 1472° F.
- 40:1 distance to spot ratio. Measures a one-foot spot from 40 feet away.
- · Measures ambient humidity and dew point
- Unit memory stores up to 20 temperature values
- KIT Includes Battery, Charger, Test Lead Set, Thermocouple (K-Type), Carrying Case and Manual

2277-21 Specifications

Temperature Range: -22°F to 1472°F Emissivity: Adj. .10
Basic Accuracy: 1.50% Distance to Spot: 40:1
Contact Temperature: -40°F to 1022°F Data Storage: 20 points

Part No. Description

2277-21 12V Li-Ion HVAC/R LASER-TEMP GUN™ Kit 2277-20 12V Li-Ion HVAC/R LASER-TEMP GUN™, Bare Tool ONLY

LASER-TEMP GUN™ Kit 2276-21

- Infrared surface temperature measurement from -22° F to 1472° F.
- 40:1 distance to spot ratio. Measures a one-foot spot from 40 feet away.
- Unit memory stores up to 20 temperature values
- KIT Includes Battery, Charger, Test Lead Set, Thermocouple (K-Type), Carrying Case and Manual

2276-21 Specifications

Temperature Range: -22°F to 1472°F
Contact Temperature: -40°F to 1022°F
Basic Accuracy: 1.50% Emissivity: 0.10 to 1.0
Distance to Spot: 40:1
Data Storage: 20 points

Part No. Description

2276-21 12V Li-Ion LASER-TEMP GUN™ Kit

2276-20 12V Li-Ion LASER-TEMP GUN™, Bare Tool ONLY



M12

12V Li-Ion 2-Beam Plumb Laser Kit

A self leveling mechanism that ensures an accurate auto plumb up to 1/4" at 100 ft., and an out-of-level indicator blinks when the leveling range exceeds four degrees.

FEATURES:

- Self-Leveling
 Out-of-Level Indicator
- Magnetic
 Low Battery Indicator

• KIT Includes Battery, Charger & Carrying Case

2320-21 Specifications

Volts: 12V
Accuracy: 1/4" @ 100'
Leveling Range: +- 4 Degrees
Laser Power: <1mW
Laser Wave Length: 635 nm

Part No. Description

2320-21 Cordless 12V 2-Beam Plumb Laser Kit
2320-20 Cordless 12V 2-Beam Plumb Laser, Tool Only





	2-Tools	2-Tools	2-Tools	2-Tools	2-Tools	4-Tools	4-Tools	
KIT COMPONENTS	2490-22	2239-23	2276-23	2290-23	2491-22	2490-24	2491-24	
2401-20 M12 Screwdriver								
2420-20 M12 HACKZALL® Recip Saw (Incl. G.P. HACKZALL® Blade)								
2471-20 M12 Copper Tubing Cutter								
2450-20 M12 1/4" Hex Impact Driver								
49-24-0145 M12 Work Light								
2239-20 M12 CLAMP-GUN™ Clamp Meter								
2276-20 M12 LASER TEMP-GUN™ Thermometer								
2290-20 M12 SUB-SCANNER™ Detection Tool								
ACCESSORIES INCLUDED:			'					
(2) 48-11-2401 M12 Lithium-Ion Batteries								
48-59-2401 M12 Battery Charger								
								4

Contractor Bag

Batteries



Battery

For use with Milwaukee M12[™] Tools & Accessories.

FEATURES:

- 1.4 amp hour battery
- Compact/Lightweight: Over 65% lighter and over 50% smaller vs. "compact" NiCd Batteries
- Ergonomic- compact, and lightweight design for operator comfort
- 2-year warranty

Part No. Description

M12 12V Battery 48-11-2401





For use with most Milwaukee M12[™] Tools and Accessories.

FEATURES:

- Increased power 2X the run-time and increased performance
- Compact Only 2-1/2" by 3-1/2"
- · Provides durable and stable base for tools to stand upright.
- Rubber over-mold to provide shock absorption and protect finished surfaces.
- · 2-year warranty

Part No. Description

48-11-2402 M12 12V XC High Capacity **Battery**

Chargers



12V Li-Ion Battery Charger

For Use with Milwaukee M12[™] Tools and Accessories. 30 minute charger.

Part No. Description

48-59-2401 M12 12V 30-min Charger



M12

12V Li-Ion Wall and Vehicle **Battery Charger**

A dually functional unit that has the capability to charge M12TM LITHIUM-ION batteries in a traditional wall outlet or vehicle DC outlet. Now, whether the user is in a work truck on the work site, one charger can do the job. The 2510-20 model is covered by the Milwaukee 5-Year Warranty.

Part No. Description 2510-20 M12 12V Wall & Vehicle Charger



12V Li-Ion Power Port

Portable charger capable of charging five small electronic devices (two at a time) on a single battery pack. Includes DC and USB ports.

Does not include M12[™] battery or charger

Part No. Description 2349-20 M12[™] Power Port



M¹² Job Site Radio

Smallest Job Site Radio with best in class reception and sound. Only 11" x 6.5" x 4", this weather-resistant radio features and advanced digital tuner and is compatable with iPod® and MP3 players.

FEATURES:

- 10 Station Presets
- Equalizer
- Digital Display
- Storage compartment for iPod or MP3 player.
- Powered by M12 Li-Ion battery, AAA Alkaline batteries or AC cord.
- INCLUDES AC Cord, (2) AAA batteries and Auxiliary Cord. (M12 battery & charger NOT included)

Part No. Description 2590-20 M12 Job Site Radio

M¹² 12V Li-Ion Worklights



Provides hands-free light in a compact and lightweight package. Both lights feature a 90° rotating head, projecting light in any direction. Integrated magnet provides hands-free use.

Worklight 49-24-0145

· Xenon incandescent bulb



LED Worklight 49-24-0146

- 90-degree pivoting aluminum head - Impact and weather resistant
- LED lights provide 2X brighter light and runs twice as long as incandescent bulbs

Lights do not include M12™ battery or charger

Part No.	Description
	Cordless Xenon Worklight Cordless LED Worklight



RENTALS



DEWALT 12V MAX® Li-Ion 3/8" Sub-Compact **Impact Wrench Kit**

- Compact, lightweight design fits into tight areas.
- 3/8" Hog ring anvil; Fast socket changing.
- 1150 in/lbs. of torque; Power for fastening, tightening and loosening.
- 3 LED work lights provides increased visibility without shadows.
- 3 Year Limited Warranty
- KIT Includes (2) batteries, fast charger, and contractor bag.

Specifications

Volts: 12 V DC 3/8" Drive-

No-Load RPM: 0-2,450 RPM Impacts/Minute: 0-3.400 IPM 1150 in/lbs. Max Torque: Weight: 2.3lbs.

Part No. Description

DCF813S2 12V 3/8" Sub-Compact Impact Wrench Kit



DEWALT 12V MAX® Li-Ion 1/4" Sub-Compact Screwdriver Kit

- · Compact, lightweight design fits into tight areas.
- One-handed loading 1/4" hex chuck accepts 1" bit tips.
- · Belt hook included for portability.
- 3 LED work lights provides increased visibility without shadows.
- 3 Year Limited Warranty
- KIT Includes (2) batteries, fast charger, bit tip, belt hook and contractor bag.

Specifications

12 V DC Volts: Max. Power: 160 UWO Drive: 1/4"

0-1,050 RPM No-Load Speed: Weight: 2.2 lbs.

Part No. Description

DCF610S2 12V 1/4" Sub-Compact Screwdriver Kit



12V LI-ION CORDLESS

DEWALT 12V MAX® Li-Ion 3/8" Sub-Compact Drill/Driver Kit

- · Compact, lightweight design fits into tight areas.
- Two speed transmission for optimal speed and torque control.
- Belt hook included for portability.
- LED work light provides increased visibility in confined spaces.
- 3 Year Limited Warranty
- KIT Includes (2) batteries, fast charger, belt hook and contractor bag.

Specifications

12 V DC Volts: Max. Power: 189 UWO # of Speed Settings: 2 Max RPM: 0 - 1,700Clutch Settings: 15 Weight: 2.4 lbs.

Part No. Description

DCD710S2 12V 3/8" Sub-Compact Drill/ Driver Kit

Specifications

Volts: 12 V DC 1/4" Drive:

No-Load RPM: 0-2,450 RPM 0-3,400 IPM Impacts/Minute: 950 in/lbs. Max Torque: Weight: 2.3lbs.

Part No. Description

DCF815S2 12V 3/8" Sub-Compact Impact Wrench Kit

DEWALT 12V MAX® Li-Ion 1/4" Sub-Compact **Impact Driver Kit**

- · Compact, lightweight design fits into tight areas.
- One-handed loading 1/4" hex chuck accepts 1" bit tips.
- Belt hook included for portability.
- 3 LED work lights provides increased visibility without shadows.
- 3 Year Limited Warranty
- KIT Includes (2) batteries, fast charger, bit tip, belt hook and contractor bag.



12V LI-ION CORDLESS



DEWALT 12V MAX® Li-Ion 1/4" Sub-Compact Screwdriver / Impact Driver Combo Kit

Impact Driver and Screwdriver both feature:

- Compact, lightweight design fits into tight areas.
- One-handed loading 1/4" hex chuck accepts 1" bit tips.
- Belt hook included for portability.
- 3 LED work lights provides increased visibility without shadows.
- 3 Year Limited Warranty
- 1 Year Free Service Contract
- 90 Day Money Back Guarantee

 KIT Includes (2) batteries, fast charger, (2) Bit tips, (2) belt Hooks, and contractor bag.

DCF 610S2 Screwdriver Specifications

Volts: 12 V DC Max. Power: 160 UWO Drive: 1/4"

No-Load Speed: 0-1,050 RPM

Weight: 2.2 lbs.

DCF815S2 Impact Driver Specifications

Volts: 12 V DC Drive: 1/4"

No-Load RPM: 0-2,450 RPM Impacts/Minute: 0-3,400 IPM Max Torque: 950 in/lbs. Weight: 2.3lbs.

Part No. Description

DCK210S2 12V 1/4" Sub-Compact Screwdriver / Impact Driver Combo Kit



DEWALT 12V MAX® Li-lon Fast Charger

- Charges all DeWalt[®] 12V MAX[®] Li-Ion batteries.
- Charges the battery in 40 minutes or less, minimizing downtime.
- Diagnostics with LED indicator communicates battery charge status: charged, charging, power line problem,

replace pack and battery too hot or too cold.

- 3 Year Limited Warranty
- 1 Year Free Service Contract
- 90 Day Money Back Guarantee

Part No. Description

DCB100 12V MAX® Li-Ion Battery Charger



DEWALT 12V MAX® Li-Ion Infrared Thermometer Kit

- Non-contact temperature measurements (-20° F to 932° F) for ease of use over distance and accuracy.
- LED hot (red) and cold (blue) indicator for visual and/or audio alarm for quickly locating trouble spots.
- Data storage for recording maximum, minimum and average temperatures.
- Adjustable emissivity improves accuracy across a wide range of materials.

Specifications

- 3 Year Limited Warranty
- 1 Year Free Service Contract
- 90 Day Money Back Guarantee

• KIT Includes battery, fast charger and kit box

Volts: 12 V DC Weight: 4.8 lbs.

Part No. Description

DCT414S1 12V Infrared Thermometer Kit



DEWALT 12V MAX® Li-lon Battery Pack

- Compact, lightweight design.
- Quick 40 minute charge time.
- No memory and virtually no self-discharge for maximum productivity and less downtime.
- Requires 12V MAX® compatible charger (DCB100)
- 3 Year Limited Warranty
- 1 Year Free Service Contract
- 90 Day Money Back Guarantee

Part No. Description

DCB120 12V MAX® Li-Ion Battery Pack



24V NICAD CORDLESS

 KIT Includes (2) batteries, 1 hour charger, 360° side handle, depth rod δ impact-resistant case.

Specifications

24 V DC Volts: No Load Speed: 0-1,100 RPM 0-4,100 BPM Blows/Min: Weight: 8.4 lbs.

Part No. Description

DC223KA 24V 7/8" SDS Hammer Kit

- · Variable speed, reversing switch delivers versatility in all applications.
- Factory-set clutch reduces sudden, high torque reactions if bit jams.
- Electro-pneumatic hammer mechanism for fast penetration and low vibration.
- 360° side handle for better control and ease of use in tight spaces.
- SHOCKS Active Vibration Control signifcantly reduces vibration and increases user comfort and productivity.
- Compact L-Shape Design allows access in tight spaces while providing optimal balance for the user.
- 1.7 ft-lbs impact energy provides corded power without the cord.



DEWALT 24V NiCd Accessories

DEWALT 24V NiCad XR+™ **Fan-Cooled Battery Pack**

- FAN COOLED technology cools down battery quickly thus extending battery life.
- High capacity XR+TM Pack battery offers extended run time without sacrificing number of recharges
- Powers entire DEWALT® line of 24V tools
- Durable slide rail interface keeps battery securely in place even during the most extreme applications.



DW0242 24V XR+ Fan-Cooled Battery Pack



DEWALT 24V Fan-Cooled Chargers

- FAN COOLED technology quickly cools battery, thus extending battery life.
- Charges all 24V batteries in 1 hr. or less, minimizing down time.
- 3-Stage charging system provides maximum run-time extending overall life of the battery.
- Battery thermal protection system prevents charging batteries that are too hot or too cold.
- Diagnostics with LED indicator communicate battery charge status.
- Durable slide rail interface keeps battery securely in place even during the most extreme applications.

Part No. De	scriptio
-------------	----------

24V Fan-Cooled Battery Charger DW0246 24V Fan-Cooled Vehicle Battery Charger DW0249





- Rock Carbide® tip for longer life.
- · Four flute design for fast, efficient drilling.
- Maximizes hammer energy for greater impact power.

Part No.	Description
DW5401B25 DW5403B25 DW5404B25	⁵ / ₃₂ x 4 ¹ / ₂ x 6 ¹ / ₂ OAL ³ / ₁₆ x 4 ¹ / ₂ x 6 ¹ / ₂ OAL ³ / ₁₆ x 6 ¹ / ₂ x 8 ¹ / ₂ OAL
DW5416B25 DW5417B25 DW5418B25 DW5421	¹ / ₄ x 2 x 4 OAL ¹ / ₄ x 2 x 4 OAL ¹ / ₄ x 6 ¹ / ₂ x 8 ¹ / ₂ OAL ¹ / ₄ x 12 x 14 OAL
DW5424B25	⁵ / ₁₆ x 4 x 6 OAL
DW5427B25	³ / ₈ x 4 x 6 OAL
DW5437B25 DW5438 DW5439	½ x 4 x 6 OAL ½ x 8 x 10 OAL ½ x 10 x 12 OAL
DW5446B25	% x 6 x 8 OAL
DW5453	³ / ₄ x 6 x 8 OAL

Be sure to visit

www.GoNefco.com

for the latest tools & products from DeWalt

18V NICAD CORDLESS



DEWALT XRP™ 18V NiCad 1/2" Drill/Driver Kit

- Patented 3-speed all-metal transmission matches the tool to task for fastest application speed and improved run time.
- Heavy-duty 1/2" ratcheting chuck helps prevent bits from slipping and falling out.
- LED Worklight provides increased visibility in confined spaces.
- High power, high efficiency motor delivers 450 unit watts out of max power for superior performance in all drilling and fastening applications.
- · Best in class length improved balance and better control.
- KIT Includes (2) batteries, 1 hour charger, and kit box

Specifications

Volts: 18 V DC Max. Power: 450 UWO

of Speed Settings: 3

Max RPM: 0-500/0-1,250/0-2,000 Clutch Settings: 22

Weight: 6.25 lbs.

Part No. Description

DCD940KX 18V XRP 1/2" Drill/Driver Kit



DEWALT 18V NiCad 1/2" Compact Drill/Driver Kit

- Compact size fits into the tightest conditions
- Lightweight design minimizes user fatigue
- High performance motor delivers maximum power of 380 unit watts out
- Dual speed range: 0-450/0-1,500 rpm delivers optimal performance
- 1/2" single sleeve keyless ratcheting chuck for tighter bit grip
- Maximum durability and reliability withstands jobsite conditions
- KIT Includes (2) batteries, 1 hour charger, double-ended screwdriver bit & kit box.

Specifications

Volts: 18 V DC Max. Power: 380 UWO

of Speed Settings:

Max RPM: 0-450/0-1,500

Clutch Settings: 17 5.2 lbs. Weight:

Part No. Description

DC759KA 18V 1/2" Compact Drill/ Driver Kit



DEWALT 18V NiCad 1/2" Compact Drill/Driver Kit

- Compact size: allows users to fit into tight spaces.
- Lightweight design minimizes user fatigue
- 1/2" ratcheting chuck reduces bit slippage.
- Dual speed range 0-500/0-1,700 rpm delivers optimal performance
- High performance frameless motor delivers maximum power of 410 unit watts out
- LED work light provides increased visibility in confined spaces
- KIT Includes (2) batteries, 1 hour charger, and kit box

Specifications

Volts: 18 V DC Max. Power: 410 UWO # of Speed Settings: 2

Max RPM: 0-500/0-1,700

Clutch Settings: Weight: 4.8 lbs.

Part No. Description

DC720KA 18V 1/2" Compact Drill/

Driver Kit

DEWALT NiCd 18V 1/2" Compact Hammerdrill Kit



- Compact size: allows users to fit into tight spaces
- · Lightweight design minimizes user fatigue
- 1/2" single sleeve ratcheting chuck reduces bit slippage
- Dual speed range 0-500/0-1,700 rpm 0-8,500/0-29,000 bpm delivers optimal performance
- High performance frameless motor delivers maximum power of 410 unit watts out
- LED work light provides increased visibility in confined spaces
- KIT Includes (2) batteries, 1 hour charger, screwdriver bit δ kit box.

Specifications

18 V DC Volts: Max. Power: 410 UWO

of Speed Settings: 2

Max RPM: 0-500/0-1,700 MAX BPM: 0-8,500/0-29,000

Clutch Settings: 17 Weight: 4.9 lbs.

Part No. Description

DC725KA 18V 1/2" Compact Hammerdrill Kit



RENTALS



DEWALT XRP™ 18V NiCad 1/2" Hammerdrill/Drill/Driver Kit

- Patented 3-speed all-metal transmission matches the tool to task application for fastest application speed
- Heavy-duty 1/2" self-tightening chuck tightens throughout operation providing superior bit gripping strength
- High power, high efficiency motor delivers 420 unit watts out of max power for superior performance in all drilling and fastening applications
- **KIT** Includes (2) batteries, 1 hour charger, 360° side handle and kit box.

Specifications

Volts: 18 V DC Max. Power: 420 UWO

of Speed Settings: 3

0-450/0-1,450/ Max RPM:

0-2.000

Max BPM: 0-7,650/0-24,650/

0-34,000

Clutch Settings: 22 Weight: 6.0 lbs.

Part No. Description

DCD959KX 18V XRP 1/2" Hammerdrill/

Drill/Driver Kit

DCD959VX Same with Vehicle Charger



DEWALT XRP™ 18V NiCad 1/2" Hammerdrill/Drill/Driver Kit

- High torque motor delivers 500 in-lbs of maximum torque
- 3-speed transmission features a max 3rd speed at 2,000 rpm
- Hammerdrill mode: 34,000 bpm drills faster holes in masonry applications
- 1/2" Metal ratcheting chuck with carbide jaws prevents bits from slipping
- Superior ergonomics provides optimal balance, comfort and control
- KIT Includes (2) batteries, 1 hour charger, 360° side handle and kit box.

Specifications

Volts: 18 V DC Max. Power: 420 UWO # of Speed Settings: 3

Max RPM: 0-450/0-1,450/

0-2.000

Max BPM: 0-7,650/0-24,650/

0-34,000

Clutch Settings: 22 Weight: 5.95 lbs.

Part No. Description

DC988KA 18V XRP 1/2" Hammerdrill/

Drill/Driver Kit

DC988VA Same, with Vehicle Charger



18V NICAD CORDLESS

DEWALT XRP™ 18V NiCad 1/2" Hammerdrill/Drill/Driver Kit

- 3-speed all-metal transmission
- Heavy-duty 1/2" self-tightening chuck tightens throughout operation
- · LED worklight provides increased visibility in confined spaces
- High power, high efficiency motor delivers 450 unit watts out of max power
- Best in class length for improved balance and better control
- KIT Includes (2) batteries, 1 hour charger, 360° side handle and kit box

Specifications

Volts: 18 V DC Max. Power: 450 UWO # of Speed Settings: 3

Max RPM:

0-500/0-1,250/

0-2,000

Max BPM: 0-8,500/0-21,250/

0-34,000

Clutch Settings: 22 Weight: 6.25 lbs.

Description Part No.

DCD950KX 18V XRP 1/2" Hammerdrill/

Drill/Driver Kit

DCD950VX Same, with Vehicle Charger

DCD950B Bare Tool Only

DEWALT XRP™ 18V NiCad 1/2" Hammerdrill/Drill/Driver Kit

Specifications

Volts: 18 V DC Max. Power: 420 UWO # of Speed Settings: 3

0-450/0-1,450/ Max RPM: 0-2.000

0-7,650/0-24,650/

5.95 lbs.

Max BPM: 0-34,000 Clutch Settings: 22

Part No. Description

DC989KA 18V XRP 1/2" Hammerdrill/

Drill/Driver Kit

DC989VA 18V XRP 1/2" Hammerdrill/ Drill/Driver Kit, with Vehicle

Charger

- High torque motor delivers 500 in-lbs of maximum torque
- Patented 3-speed transmission features a maximum 3rd speed At 2,000 rpm
- Hammerdrill mode: 34,000 bpm drills faster holes in masonry applications
- 1/2" metal ratcheting chuck with carbide jaws helps to prevent bits from slipping
- Superior ergonomics provides optimal balance, comfort and control
- KIT Includes (2) batteries, 1 hour charger, 360° side handle and kit box.



Philadelphia, PA 610-647-8070

Weight:







18V NICAD CORDLESS

DEWALT XRP™ 18V NiCad 1/4" Impact Driver

- Compact size & weight allows access into tighter areas and reduces user fatigue.
- Textured ant-slip comfort grip provides maximum comfort.
- Durable magnesium gear case and all metal transmission for extended durability.
- Heavy duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case

Specifications

Volts: 18 V DC 1/4" Hex shank Drive Size: quick release No Load Speed: 0-2,400 rpm Impacts/min: 0-2,700 bpm Max Torque: 111 ft.-lbs. 4.6 lbs. Weight: Part No. Description

DC825KA 18V XRP 1/2"

Impact Driver

DC825KB Bare Tool, ONLY



DEWALT XRP™ NiCad 18V 1/2" Impact Wrench

- Compact size & weight allows access into tighter areas and reduces user fatigue.
- Textured anti-slip comfort grip provides maximum comfort.
- Durable magnesium gear case and all metal transmission for extended durability.
- · Heavy duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case

Specifications

Volts: 18 V DC Drive Size: 1/2" square w/detent pin No Load Speed: 0-2,400 rpm

Impacts/min: 2,700 bpm Max Torque: 145 ft.-lbs. Weight: 4.6 lbs.

Description Part No.

18V XRP 1/2" DC820KA Impact Wrench

Kit

DC820KB Bare Tool, ONLY



DEWALT XRP™ NiCad 18V 1/2" High Torque **Impact Wrench**

- Preferred rocker switch design for fast, easy fastening.
- · Comfort grip provides maximum comfort
- Durable magnesium gear case and all metal transmission for extended durability.
- Heavy-duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case.

Specifications

18 V DC Volts: 1/2" square Drive Size: w/detent pin

No Load Speed: 1,650 rpm Impacts/min: 2,600 bpm Max Torque: 3,600 in-lbs. 300 ft.-lbs. Weight: 7.55 lbs.

Part No. Description

DW059K-2 18V XRP 1/2" High Torque

Impact Wrench DW059B Bare Tool, ONLY



DEWALT XRP™ NiCad 18V 1/2" High Torque **Impact Wrench**

- Durable all-metal gear case and transmission
- Variable speed trigger and electric brake
- Textured anti-slip comfort grip
- Heavy-duty impact mechanism delivers torque to fastener without kickback
- Works with all 18V DEWALT® batteries (XRP^{TM} , $NANO^{TM}$ and Compact)
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case.

Specifications

Volts: 18 V DC Drive Size: 1/2" square

w/detent pin

No Load Speed: 2,100 rpm 3,000 bpm Impacts/min: 1,920 in-lbs. Max Torque: 160 ft.-lbs.

Weight: 5.3 lbs.

Part No. Description

DC821KA

18V XRP 1/2" High Torque Impact Wrench

DEWALT XRP™ NiCad 18V 3/8" Impact Wrench Kit



- Frameless motor for extended tool durability and life
- · Compact size and weight allow access into tighter areas and reduces user fatigue
- 1,500 in-lbs of torque to perform a wide range of fastening applications
- 0-2,400 rpm/0-2,700 ipm for faster application speed
- Replaceable brushes for increased serviceability
- Textured anti-slip comfort grip provides maximum comfort
- Durable magnesium gear case and all metal transmission for extended durability
- Heavy-duty impacting mechanism directs torque to fastener without kickback

• KIT Includes (2) batteries, 1 hour charger, 360° side handle and kit box.

Specifications

Volts: 18 V DC Drive Size: 3/8" square

w/hog ring retention pin

No Load Speed: 0-2,400 rpm Impacts/min: 2,700 bpm Max Torque: 125 ft.-lbs. Weight: 4.6 lbs.

Part No. Description

DC823KA 18V XRP 3/8" Impact Wrench Kit

DC823B Bare Tool, ONLY



RENTALS

DEWALT XRP™ NiCad 18V 7/8" SDS Hammer Kit

- Variable speed, reversing switch delivers versatility in all applications.
- Factory-set clutch reduces sudden, high torque reactions if bit jams.
- Electro-pneumatic hammer mechanism for fast penetration and low vibration.
- 360° side handle for better control and ease of use in tight spaces.
- SHOCKS Active Vibration Control significantly reduces vibration
- Compact L-Shape Design allows access in tight spaces while providing optimal balance
- 1.7 ft-lbs impact energy provides corded power without the cord.

• KIT Includes (2) batteries, 1 hour charger, 360° side handle, depth rod δ kit box

Part No. Description

DC212KA 18V 7/8" SDS Hammer Kit DC212B Bare Tool, ONLY

Specifications

18 V DC Volts: 0-1,100 RPM No Load Speed: 0-4,100 BPM Blows/Min: Weight: 7.6 lbs.



18V NICAD CORDLESS

DEWALT XRP™ NiCad 18V 41/2" Cut-Off Tool Kit

- 6,500 rpm provides high power for cutting and grinding applications
- Convenient trigger switch with lock-off button for easier gripping
- 2 Position side handle offers greater comfort and control
- · Quick-change wheel release provides easier and quicker wheel removal without the need for a wrench
- Jam-pot, low profile gear case provides precise gear alignment for a smoother, quieter transmission while allowing access to tight space
- KIT Includes (2) batteries, 1 hour charger, Type 27 & Type 1 guards, 2 matched flanges, wrench, Type 27 wheel, 2-position side handle δ contractors bag.

Part No.	Description

DW411KA 18V Cordless 41/2" Cut-Off

Tool Kit

DW411B Bare Tool ONLY

Specifications

Volts: 18 V DC No Load Speed: 6,500 rpm Spindle Thread: 5/8"-11 Spindle Lock: Yes Min. Wheel RPM: 10,000 rpm Weight: 7.0 lbs.



DEWALT XRP™ NiCd 18V Reciprocating Saw Kit

Specifications

Volts: 18 V DC 0-3,000 spm Strokes/minr: Stroke length:

11/8" Electric Brake: Yes 8.2 lbs. Weight:

Part No. Description

DC385K 18V XRP Reciprocating Saw Kit

- 4-position blade clamp allows for flush cutting and increased versatility.
- · Lever-action keyless blade clamp.
- Anti-slip comfort grip.
- Pivoting adjustable shoe with open top.
- Variable speed with trigger lock.
- KIT Includes (1) battery, 1 hr. charger, reciprocating saw blade & hard case



DEWALT XRP™ NiCad 18V 18 Ga. Swivel Head & Shear Kit

Specifications

Volts: 18 V DC Strikes/Min: 0-2,300 spm

Min. Cut Radius: 5.5" 18-28 ga. Cap. in Steel: Weight: 6.1 lbs.

Description Part No.

DC490KA 18V Cordless Swivelhead

& Shear Kit

- Head swivels 360° which allows user to access tight quarters while maintaining comfort.
- Cuts 7/32" strip which continuously curls out of the cutting area.
- KIT Includes (2) batteries, 1 hour charger, Blade Wrench & impact-resistant case





18 ∰ volt

RENTALS



18V NICAD CORDLESS

DEWALT XRP™ NiCad 18V 61/2" Circular Saw

- 3,700 RPM for fast rip cuts & cross cuts.
- 61/2" carbide tipped blade for 2X cutting capacity at 90° and 45°.
- High strength magnesium shoe and upper guard provides increased durability.
- 0-50° bevel capacity.
- Fan-cooled motor with replaceable brushes.
- XRP[™] extended run-time battery provides long run-time & battery life.
- KIT Includes (1) battery, 1 hour charger, 16 tooth-carbide saw blade, rip fence, blade wrench & impact-resistant case

Specifications

18 V DC Volts: No Load Speed: 3,700 rpm Blade Diameter: 61/2" Bevel Capacity: 0-50° Arbor Size: 5/8"

Depth of Cut: 15/8" @ 45° / 21/4" @ 90°

Weight: 8.7 lbs.

Part No. Description

DC390K 18V XRP 61/2" Circular Saw Kit



DEWALT XRP™ NiCad 18V 63/4" Metal Cutting Circular Saw

- 63/4" 40-tooth carbide tipped blade cuts up to 2" conduit and pipe in one pass.
- All metal upper and lower guards for maximum durability.
- Multi-Coated SIGHT-LINE™ Window for maximum abrasion resistance.
- · Stainless-steel shoe stays rust free while minimizing chip build-up which prevents marring of the cutting surface.
- ULTRA SIGHT-LINE™ Scope allows maximum visibility to the cut line.
- KIT Includes (2) batteries, 1 hour charger, 40 tooth titanium carbide saw blade, δ impact-resistant case

Specifications

18 V DC Volts: No Load Speed: 3,200 rpm Blade Diameter: 63/4" Bevel Capacity: N/A Arbor Size: 20_{mm} Depth of Cut: 23/8" @ 90° 9.5 lbs. Weight:

Description Part No.

DW934K-2 18V 63/4" Metal Cutting Circular Saw Kit



XRP™ NiCad 18V Pencil Vibrator Kit

• 11/8" diameter x 4' long flexible

shaft provides easy use and long reach.

- 14,000 VPM (under load) delivers maximum consolidation efficiency.
- KIT Includes (2) batteries, 1 hour charger, soft-side bag for batteries & charger

Part No. Description

DC530KA 18V XRP Cordless Pencil Vibrator Kit

DC530KA



DEWALT XRP™ NiCad 18V Cut-Out Tool

- Tool-free bit change for fast and easy bit changing
- 26,000 rpm motor provides more cutting power
- Dust sealed switch provides durability and long switch life

• KIT Includes (2) batteries, 1 hour charger, (1) general purpose bit, (1) drywall cutting bit, 1/4" δ 1/6" collets δ impact-resistant case.

Part No. Description

DC550KA 18V XRP Cut-Out Tool Kit



DEWALT XRP™ NiCad 18V Light Gauge Steel Framing Screwdriver Kit

- VERSA-CLUTCH® torque adjustment system to "dial" the proper torque needed.
- 0-900/0-2,700 rpm for better fastener control in various material thickness.
- Tool designed for steel fastening applications that is ideal for use in 12-28 ga.
- KIT Includes (2) batteries, 1 hour charger, #2 Phillips screwdriver bit, 5/16" nut runner & impact-resistant case

Specifications

18 V DC Volts: Drive Size: 1/4" Hex in

No Load Speed: 0-9,000/0-2,700 rpm

Max Torque: 180 ft.-lbs. Capacity (CRS): 12-28 gauge Weight: 5.4 lbs.

Part No. Description

DC668KA 18V XRP Cordless Light

Gauge Steel Framing Screwdriver Kit



DEWALT XRP™ NiCad 18V Drywall/Deck Screwdriver Kit

- Dual speed ranges; high speed for drywall, low speed for decking.
- · Depth sensitive "set and forget" nosepiece for consistent fastener depth.
- High-performance motor with fan cooling delivers maximum power and durability.
- KIT Includes (2) batteries, 1 hour charger, Bit tip/magnetic holder, drywall nosepiece, TEKS[®] nosepiece & impact-resistant case.

Specifications

18 V DC Drive Size: 1/4" Hex in

No Load Speed: 0-9,000/0-2,900 rpm

Max Torque: 180 ft.-lbs. Capacity (CRS): 12 gauge Weight: 12.3 lbs.

Part No. Description

DC520KA 18V XRP Cordless Drywall/

Deck Screwdriver Kit

DEWALT

Combination Kits

	2-Tools	2-Tools	2-Tools	4-Tools	4-Tools	5-Tools	6-Tools	6-Tools	9-Tools	9-Tools
KIT COMPONENTS	DCK 255X	DCK 251X	DCK 250X	DCK 450X	DCK 455X	DCK 550X	DCK 650X	DCK 655X	DCK 950X	DCK 955X
DCD950 18V 1/2" Hammerdrill Drill Driver (Includes 360° Side Handle)										
DW960 18V Right Angle Drill										
DC385 18V Recip Saw										
DC390 18V 6-1/2" Circular Saw (Includes 6-1/2" Blade)										
DC330 18V Jig Saw										
DC825 18V 1/4" Hex Impact Driver										
DW059 18V 1/2" High Torque Impact Wrench										
DC411 4-1/2" Cut-Off Tool (Includes Guards, Backing Flange, Wrench & Type 1 Wheel)										
DC550 18V Cut-Out Tool										
DW919 Flexible Floodlight										
ACCESSORIES INCLUDED:										
(2) DC9096 18V Li-lon Batteries										
DC9310 1-Hour Charger										
Contractor Bag									(2) Bags	(2) Bags

DEWALT

18V NiCad Accessories



DEWALT

18V NiCd XRP™ Battery Pack

- High capacity XRPTM battery has 40% more run-time than standard batteries.
- Powers entire DeWalt line of 18V tools allowing users to run multiple tools off of the same battery pack.

Part No. Description

DC9096 18V XRP Battery Pack



DEWALT 18V NiCd Chargers

- Charges DEWALT® 7.2V 18V NiCd and NiMH batteries.
- 3-Stage Charging System, Thermal Protection and LED Diagnostic indicators provides maximum run-time and extends overall life of the battery.

Part No.	Description		
DC9310	18V Charger		

DW9216 18V Dual-Port Charger DW9117 18V 15 min. Charger DW9109 18V Charger Vehicle Charger



DEWALT Worksite Radio Charger

- Charges 7.2V to 18V NiCad battieries.
- AM/FM Digital tuner with LCd display, built-in clock, and 8 station memory presets.
- Runs off 7.2V to 18V batteries and 120V AC/DC.
- Auxiliary port allows connection to CD players, MP3 players, iPods, and portable satellite receivers with an audio cable. (Cable not included).

Part No. Description

DC011 Worksite Radio Charger



DEWALT 18V ½ Gallon Wet/Dry Portable Vac

- 1/2 gallon tank with heavy-duty latch is easy to empty and clean
- Gore[™] HEPA wet/dry filter traps 99.97% of dust at 0.3 microns
- Washable filter, rinse to clean. Tank is easy to empty and clean
- Heavy-duty rubber hose
- Includes (1) XRP[™] battery (NICd), 1 hour charger.

Specifications

Tank Size 1/2 gal
Voltage 18 V DC
Hose Diameter 1-1/4"
Weight 6.0 lbs
Hose Length 2.5 feet

Part No. Description

DC515K 18V 1/2 gal. Portable Wet/ Dry Vac



DEWALT18V Flexible Floodlight

- Flex neck design with lockable head clips allow for hands free use and versatility to stand or hang light.
- Wide angle beam of light provides more light than a conventional flashlight.
- Xenon bulb provides extra bright beam of light.
- Battery/Charger not included.

Specifications

Volts: 18 V DC
Bulb: Xenon
Run-Time: 3 hours
Weight: 0.5 lbs.

Part No. Description

DW919 18V Flexible Floodlight



DEWALT 18V Pivoting Head Flashlight

- Wide angle beam
- Head rotates 90°
- Xenon bulb provides extra bright beam of light
- Lightweight, compact design
- Battery/Charger not included

Specifications

Volts: 18 V DC
Bulb: Xenon
Run-Time: 3 hours
Weight: 0.5 lbs.

Part No. Description

DW908 18V Flashlight

DEWALT 18V Fluorescent Area Light

- Built-in telescoping hook allows hanging from 2" materials.
- Over-molded lens for increased durability
- 13W fluorescent bulb
- Lightweight, compact design
- Battery/Charger not included

Part No. Description

DC515 18V Fluorescent Area Light







DEWALT 14.4V NiCad 1/2" Hammerdrill/Drill/Driver Kits

- DeWalt built high power, high efficiency motor delivers maximum performance in all drilling and fastening applications.
- XRP[™] extended run-time batteries provide long run-time & battery life.
- Patented 3-speed all-metal transmission matches the speed to the application for optimal performance.
- Heavy-duty 1/2" self-tightening chuck tightens throughout operation providing superior bit gripping torque.
- Superior ergonomics optimize balance, size and weight.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case

Specifications

Volts: 14.4 V DC Max. Power: 335 UWO

of Speed Settings: 3

Max RPM: 0-450/0-1,450/0-1,800 Max BPM: 0-7,650/0-24,650/0-30,600

Clutch Settings: 22 5.4 lbs. Weight:

Description Part No.

DC935KA 14.4V 1/2" Hammerdrill/Drill/

Driver Kit

DC936KA 14.4V 1/2" Hammerdrill/Drill

Driver Kit



DEWALT 14.4V NiCad 1/2" Drill/Driver Kit

- DeWalt built high power, high efficiency motor delivers maximum performance in all drilling and fastening applications.
- XRP[™] extended run-time batteries provide long run-time & battery life.
- Patented 3-speed all-metal transmission matches the speed to the application for optimal performance.
- Heavy-duty 1/2" self-tightening chuck tightens throughout operation providing superior bit gripping torque.
- Superior ergonomics optimize balance, size and weight.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case.

Specifications

Volts: 14.4 V DC Max. Power: 335 UWO

of Speed Settings: 3

Max RPM: 0-450/0-1,450/0-1,800

Clutch Settings: 22 5.3 lbs. Weight:

Part No.

Description

DC930KX 14.4V 1/2" Drill//Driver Kit



14.4 NICAD CORDLESS

DEWALT 14.4V NiCad 1/2" Compact Drill/Driver Kit

- Compact size: fits into the tightest conditions.
- Lightweight design minimizes user fatigue.
- 1/2" single sleeve keyless ratcheting chuck for tighter bit grip.
- Maximum durability and reliability withstands jobsite conditions.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case

Specifications

Volts: 14.4 V DC Max. Power: 270 UWO

of Speed Settings: 3

0-400/0-1,400 Max RPM: Clutch Settings: 17 Weight: 4.7 lbs.

Part No. Description

DC728KA 14.4V 1/2" Compact Drill/

Driver Kit



DEWALT 14.4V **Replacement Battery**

· Powers entire line of DeWalt 14.4V tools.

Part No. Description

DC9091 14.4V Battery

DEWALT 14.4V NiCad 3/8" Right Angle Drill/Driver Kit

• KIT Includes (2) batteries, 1 hour charger & impactresistant case

Specifications

14.4 V DC Volts: Max. Power: 210 UWO

of Speed Settings: 2

Max RPM: 0-400/0-1,250 Chuck Type: Plastic. 2-Sleeve

Weight: 4.4 lbs.

Description DW966K-2 14.4V 3/8" Right Angle Drill/Driver Kit

- 2 speed ranges 0-450/0-1,250 rpm for increased user flexibility providing a wide range of applications.
- 210 unit watts out of maximum power for heavy-duty applications.
- Multi-grip trigger provides comfort and convenience by allowing the user to get into tighter spaces while still having access to the trigger.
- Variable speed and reversing gives the user the ability to control speed.
- · Durable, right angle transmission with sealed ball bearing for a longer tool life.





Part No.



RENTALS





14.4V NICAD CORDLESS

DEWALT 14.4V NiCad 1/2" Square Drive Impact Wrench Kit

- Compact size & weight allows access into tighter areas and reduces user fatigue.
- 1,550 in-lbs of max torque to perform a wide range of fastening applications.
- 0-2,400 rpm/0-3,000 bpm for faster application speed.
- Textured ant-slip comfort grip provides maximum comfort.
- Durable magnesium gear case and all metal transmission for extended durability.
- Heavy duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) batteries, 1 hour charger,
 δ impact-resistant case.

Specifications

Volts: 14.4 V DC
Drive Size: 1/2" Square Drive
No Load Speed: 0-2,400 rpm
Impacts/min: 0-2,700 ipm
Max Torque: 135 ft.-lbs.
Weight: 3.9 lbs.

Part No. Description

DC830KA 14.4V 1/2" Cordless Impact Driver Kit



DEWALT 14.4V NiCad 1/4" Hex Shank Impact Wrench Kit

- Compact size & weight allows access into tighter areas and reduces user fatigue.
- 1,550 in-lbs of max torque to perform a wide range of fastening applications.
- 0-2,400 rpm/0-3,000 bpm for faster application speed.
- Textured ant-slip comfort grip provides maximum comfort.
- Durable magnesium gear case and all metal transmission for extended durability.
- Heavy duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) batteries, 1 hou.r charger, & impact-resistant case.

Specifications

Volts: 14.4 V DC
Drive Size: 1/2" Square Drive
No Load Speed: 0-2,400 rpm
Impacts/min: 0-2,700 ipm
Max Torque: 103 ft.-lbs.
Weight: 3.9 lbs.

Part No. Description

DC835KA 14.4V 1/4" Cordless Impact Driver Kit

14.4 DW937K

DEWALT 14.4V NiCad Reciprocating Saw

- Keyless blade change allows quick blade change without touching blade or reciprocating shaft.
- Electric brake reduces coast time.
- Compact and lightweight
- Pivoting shoe with open top for maximum visibility.
- Blade reverses for upside down cutting
- Variable speed with trigger lock for more precise cutting.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case.

Specifications

Volts: 14.4 V DC Strokes/Min: 0-2,700 spm Stroke Length: 7/8" rpm Weight: 6.0 lbs.

Part No. Description

DW937K 14.4V Reciprocating Saw Kit

DEWALT 14.4V NiCad Cut-Out Tool

- Tool-free bit change for fast and easy bit changing without a wrench
- 26,000 rpm motor provides more cutting power
- Dust sealed switch provides durability and long switch life



• KIT Includes (2) bateries, 1 hour charger, (1) general purpose bit, (1) drywall cutting bit, ¼" & ½" collets & impactresistant case.

Specifications

Volts: 14.4 V DC
No Load Speed: 26,000 rpm
Collet Dia.: 1/4", 1/8"
Adjustable Guide: Yes
Weight: 4.5 lbs.

Part No. Description

DC551KA 14.4V Cut-Out Tool Kit

DEWALT 14.4V NiCad Swivel Head Shear



- Head swivels 360°, allows user to access tight quarters while maintaining comfort
- Cuts 7/32" strip which continuously curls out of the cutting area providing consistent and accurate cuts
- KIT Includes (2) batteries, 1 hour charger, blade wrench & impact-resistant case.

Specifications

Volts: 14.4 V DC
Strokes/Min: 0-2,300 spm
Min. Cutting Radius: 5.5"
Capacity in steel: 18-28 ga.
Weight: 5.8 lbs.

Part No. Description

DW941K 14.4V Swivel Head Shear

Kit

RENTALS

12V NICAD CORDLESS



DEWALT 12V NiCad 1/2" Impact Wrench Kit

- Compact size & weight allows access into tighter areas.
- Textured ant-slip comfort grip provides maximum comfort.
- Durable magnesium gear case and all metal transmission for extended durability.
- · Heavy duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case.

Specifications

Volts: 12 V DC Drive Size: 1/2" Sq.

Drive

No Load Speed: 0-2,400 rpm 0-2,700 ipm Impacts/min: Max Torque: 120 ft.-lbs. Weight: 3.6 lbs.

Part No. Description

DC840KA 12V 1/2" Impact Wrench Kit



DEWALT 12V NiCad 3/8" Impact Wrench Kit

- Compact size & weight allows access into tighter areas.
- Textured ant-slip comfort grip provides maximum comfort.
- Durable magnesium gear case and all metal transmission for extended durability.
- · Heavy duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case

Specifications

Volts: 12 V DC Drive Size: 3/8" Sa. Drive

No Load Speed: 0-2,400 rpm Impacts/min: 0-2,700 ipm Max Torque: 105 ft.-lbs. 3.65 lbs. Weight:

Part No. Description

DC841KA 12V 3/8" Impact Wrench Kit



DEWALT 12V NiCad **Drill/Driver Kit**

- Heavy-duty 1/2" ratcheting chuck
- Superior ergonomics optomize optimal balance, size and weight.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case

Specifications

Volts. 12 V DC 285 UWO Max. Power: # of Speed Settings: 3 0-450/0-1,450 Max RPM:

0-1,800 RPM

Clutch Settings: 22 5. lbs Weight:

Part No. Description

DC940KX 12V Drill/Driver Kit



DEWALT 12V NiCad Compact Drill/Driver Kit

- Compact Size: fits into the tightest conditions.
- 3/8"single sleeve keyless ratcheting chuck for tighter bit grip.
- Superior ergonomics optomize optimal balance, size and weight.
- KIT Includes (2) batteries, 1 hour charger, double-ended & impact-resistant case.

Specifications

Volts: 12 V DC Max. Power: 230 UWO # of Speed Settings: 2 Max RPM: 0-450/0-1.450

Clutch Settings: 17

3.9. lbs Weight:

Part No.

Description 12V Compact

DC727KA Drill/Driver Kit



KIT Includes (2) batteries, 1 hour charger, & impact-resistant case

Part No. Description

DC845KA 12V 1/4" Hex Impact Driver Kit

DEWALT 12V NiCad 1/4" Hex Shank Impact **Driver Kit**

- Compact size & weight allows access into tighter areas.
- Textured ant-slip comfort grip.
- Durable magnesium gear case and all metal transmission for extended durability.
- · Heavy duty impacting mechanism directs torque to fastener without kickback.

Specifications

Volts: 12 V DC Drive Size: 1/4" Hex Drive

No Load Speed: 0-2,400 rpm 0-2,700 ipm Impacts/min: Max Torque: 96 ft.-lbs. Weight: 3.6 lbs.



DEWALT 12V NiCad 3/8" Right Angle **Drill Kit**

- Multi-grip trigger provides comfort and convenience allowing the user to get into tight spaces
- Variable speed and reversing gives the user the ability to control speed
- Durable, right angle transmission with sealed ball bearing provides a longer tool life

Specifications

Volts: 12 V DC Max. Power: 186 UWO # of Speed Settings: 2 0-400/0-1,200 Max RPM: Weight: 4.1 lbs

Part No. Description

DW965K-2 12V Right-Angle Drill Kit



9.6V - 7.2V NICAD CORDLESS



DEWALT 9.6V NiCad 3/8" Drill/Driver Kit

- Heavy-duty 3/8" single sleeve ratcheting chuck for tighter bit gripping ability.
- Dual speed range delivers maximum versatility.
- 15-position adjustable clutch.
- Rubber grip for maximum comfort.
- Compact size and lightweight design
- KIT Includes (2) batteries, 1 hour charger, double-ended screwdriver bit & impactresistant case.

Specifications

Volts: 9.6 V DC Max. Power: 130 UWO # of Speed Settings: 2

of Speed Settings: 2
Max RPM: 0-300/0-1,100

Clutch Settings: 15
Weight: 34

Weight: 3.4. lbs

Part No. Description

DC750KA 9.6V Drill/Driver



DEWALT 9.6V NiCad 1/4" Hex Shank Impact Driver Kit

- Compact size & weight allows access into tighter areas.
- Textured ant-slip comfort grip.
- Durable magnesium gear case and all metal transmission for extended durability.
- Heavy duty impacting mechanism directs torque to fastener without kickback.
- KIT Includes (2) batteries, 1 hour charger, & impact-resistant case.

Specifications

Volts: 9.6 V DC
Drive Size: 1/4" Hex
Drive
No Load Speed: 0-2,400 rpm

Impacts/min: 0-2,700 ipm Max Torque: 80 ft.-lbs. Weight: 3.3 lbs.


Part No. Description

DC855KA 9.6V 1/4" Hex Impact Driver Kit

DEWALT 9.6V NiCd 3/8" Right Angle Drill Kit

 Multi-grip trigger provides comfort and convenience allowing the user to get into tight spaces

Variable speed and reversing gives the user the ability to control speed



 KIT Includes (2) batteries, 1 hour charger, double-ended screwdriver bit & impactresistant case.

Specifications

Volts: 9.6 V DC
Max. Power: 130 UWO
of Speed Settings: 2
Max RPM: 0-400/0-1,100
Clutch Settings: 2
Weight: 3.9. lbs

Part No. Description

DW955K-2 9.6V Right -Angle Drill/ Driver kit



DEWALT 7.2V NiCd 2-Position Screwdriver Kit

- Superior power to weight ratio in a variety of fastening applications.
- Adjustable 2-position handle allows for operation as both in-line and pistol-grip.
- Variable speed and reversing trigger switch.
- Industrial quick-release hexshank chuck.
- Electric brake provides increased productivity
- Heavy-duty metal hinge provides secure and sustained two-position lock.
- KIT Includes (2) batteries, 1 hour charger, double-ended screwdrivewr bit & impactresistant case.

Specifications

Volts: 7.2 V DC
No Load Speed: 0-500 RPM
Max Torque: 80 in.-lbs.
Weight: 3.5. lbs

Part No. Description

DW920K-2 7.2V 2-Position Screwdriver Kit

DEWALT Universal Chargers



- Charges DEWALT® 7.2V 18V NiCd and NiMH batteries.
- 3-Stage Charging System, Thermal Protection and LED Diagnostic indicators provides maximum run-time and extends overall life of the battery.

Part No.	Description
DC9310 DW9216	18V Charger 18V Dual-Port
DW9117	Charger 18V 15 min.
DW9109	Charger 18V Charger Vehicle Charger

DEWALT NiCad Battery Packs - 12V - 9.6V - 7.2V



Part No.	Description
DC9071	12V NiCd Battery
	Pack
DW9061	9.6V NiCd
	Battery Pack
DW9057	7.2V NiCd
	Battery Pack





Lighting



Worklight

- Clip-Lok[™] system ready.
- 140° pivoting head.

Description

49-24-0185 V28 Li-Ion Work Light



M¹⁸ 18V Li-lon Worklights

- Ergonomic, compact, and lightweight design
- Fold-away utility hook
- 135 degree rotating head

Part No.

Description

M18 LED 2735-20 Worklight 49-24-0171 M18 Worklight

M¹² 12V Li-lon Worklights

Hands-free light in a compact and lightweight package. Both lights feature a 90° rotating head. Integrated magnet provides hands-free use.



Worklight 49-24-0145

 Xenon incandescent bulb

LED Worklight 49-24-0146



- 90-degree pivoting aluminum head -Impact and weather resistant
- LED lights provide 2X brighter light and runs twice as long as incandescent bulbs

Lights do not include M12™ battery or charger

	7 11 0	
Part No.	Description	
49-24-0145	Cordless Xenon Worklight	1
49-24-0146	Cordless LED Worklight	1

DEWALT Lighting



DEWALT 36V, 28V & 18V **Floodlights**

- Flex neck design with lockable head clips.
- Wide angle beam of light.
- 8 hours run-time on a single

Battery/Charger not included

Part No.	Description
DC509	36V Floodlight
DC519	28V Floodlight
DW919	18V Floodlight

DEWALT 18V Fluorescent **Area Light**



- Built-in hook allows hanging.
- Over-molded lens • 13W fluorescent bulb
- Lightweight, compact design
- · Battery/Charger not included

Description

DC515

18V Fluorescent Area Light



DEWALT Worklight/Charger w/GFCI Protection

- Cordless/corded 38W fluorescent worklight runs on 12-18V DeWalt batteries or AC power to provide area lighting.
- 1 hour dual port battery charger charges (2) DeWalt 7.2-18V batteries (NiCad).
- (3) GFCI protected power outlets.
- · Spring loaded battery hold down keeps batteries secure.
- Quick and easy fold-up, transport and storage.

Part No.	Description
DC022	Worklight/Dua
	Port Charger

DEWALT 18V Pivoting **Head Flashlight**



- Wide angle beam
- Head rotates 90°
- · Lightweight, compact design
- Battery/ Charger not included

Part No.

Description

DW908

18V Flashlight

M¹² Job Site Radio



Only 11" x 6.5" x 4", this weather-resistant radio features an advanced digital tuner and is compatable with iPod® and MP3 players.

FEATURES:

- 10 Station Presets
- Equalizer
- Digital Display
- Storage compartment for iPod/MP3 player.
- Powered by M12 Li-Ion battery, AAA Alkaline batteries or AC cord. (M12 battery & charger NOT included).

Part No.

Description

2590-20

M12 Job Site Radio

Jobsite Radio



- AM/FM Tuner,
- Weather sealed compartment -Protects MP3 players and other audio devices
- ABS polymer

and steel construction protects against weather and abusive job site conditions

- Equalizer and 10-station presets
- Runs on Milwaukee M12[™], M18[™], V18[™] V28®, NiCd 12V to 28V, and 120V AC.
- 12V DC Output Provides power to charge most small electronic devices

Part No. Description

2790-20 M18 Jobsite Radio



DEWALT Worksite Radio Charger

- Runs on and charges 7.2V to 18V NiCad batteries.
- AM/FM Digital tuner, on LCD display, builtin clock, and 8 station memory presets.
- · Auxiliary port allows connection to CD players, MP3 players, iPods, with an audio cable. (Cable not included).

Part No.	Description

DC011 Worksite Radio Charger



290

DEWALT

Batteries	Part No.	Voltage	Description	Charger(s)	Part No.	Description
	DW9057 (NiCad)	7.2V	Entire line of DeWalt 7.2V NiCad Cordless Tools (Except Univolt® line)		DW9310	7.2V - 18V Universal Nicad/NiMh/ Li-Ion Charger
	DW9061 (NiCad)	9.6V	Entire line of DeWalt 9.6V NiCad Cordless Tools (Except Univolt® line)	% -	DW9216	7.2V - 18V Universal Nicad/NiMh/ Li-Ion Charger
	DC9071 (NiCad)	12V	Entire line of DeWalt 12V NiCad Cordless Tools (Except Univolt® line)		DC9117	7.2V - 18V Universal Nicad/NiMh/ Li-Ion Charger
	DC9091 (NiCad)	14.4V	Entire line of DeWalt 14.4V NiCad Cordless Tools (Except Univolt® line)	(DW9109	7.2V - 18V Universal Vehicle Nicad/NiMh/ Li-Ion Charger
	DC9096 (NiCad)	18V	Entire line of DeWalt 18V NiCad Cordless Tools (Except Univolt® line)			

To ensure the maximum life of a NiCad battery pack, there are some guidelines which must be followed as general maintenance.

- Batteries perform best if charged at room temperatures. Do not charge in temperatures below 40°F or above 105°F. Under these conditions, the battery will not take a full charge and may be permanently damaged. Store the battery in a cool, dry place. Temperatures exceeding 120°F may reduce the battery life.
- If the battery is hot, let it sit out of the charger for a least 2 hours until it is at room temperature.

CORDLESS BATTERIES AND CHARGERS

- Do not try to discharge the battery beyond the point where the tool no longer performs with the power and torque needed for the job, this cause permanent damage which will prevent the battery from taking a full charge.
- Periodically charge the battery overnight to take full advantage of the 3-Stage Charging System for optimum runtime and battery life.

Batteries	Part No.	Voltage	Description	Charger(s)	Part No.	Description
	DC9180 (Li-lon)	18V	Entire line of DeWalt 18V NANO™ Li-Ion and NiCad Cordless Tools		DC9310	7.2V - 18V Universal Nicad/NiM h/ Li-Ion Charger
	COMPACT DC9181 (Li-lon)	18V	Entire line of DeWalt 18V NANO™ Li-Ion and NiCad Cordless Tools		DC9216 (Dual-Port)	
	DW0242 (NiCad)	24V	Entire line of DeWalt 24V NiCad Cordless Tools		DW0246 DW0249	24V Fan Cooled Charger 24V Fan- Cooled Vehicle Charger
	DC9280 (Li-lon)	28V	Entire line of DeWalt 28V NANO™ Li-Ion Cordless Tools			28V - 36V
BANK!	DC9360 (Li-lon)	36V	Entire line of DeWalt 28V NANO™ Li-Ion Cordless Tools		DC9000	NANO™ Li-Ion Charger

ANCHORS

STRUT

THREADED ROD

TOOLS

ABRASIVES

ONSITE SUPPLY

SAFETY

RENTALS

MILWAUKEE

CORDLESS BATTERIES AND CHARGERS



Batteries	Part No.	Voltage	Description	Charger(s)	Part No.	Description	
	48-11-0100 (NiCad)	2.4V	Entire line of Milwaukee 2.4V NiCad Cordless Tools		48-59-0300	2.4V NiCad Charger	
	48-11-0080 (NiCad)	9.6V	Entire line of Milwaukee 9.6V NiCad Cordless Tools		48-59-0192	9.6V - 12V NiCad Charger	
*	48-11-0200 (NiCad)	12V	Entire line of Milwaukee 12V NiCad Cordless Tools (Except PowerPlus Models)		48-59-0172 (Vehicle)		
in .	48-11-1970 (NiCad)	12V	Entire line of Milwaukee 12V NiCad "Slide-On" Battery Style Cordless Tools		48-59-0255 48-59-0186 (Vehicle)	12V, 14.4V, 18V NiCad Charger	
	48-11-2401 (Li-Ion)	12V	Entire line of Milwaukee 12V M12 Li-lon Cordless Tools		2510-10 (Wall/Vehicle	12V Li-lon Charger for M12 Series Tools	
	High Capacity (XC) 48-11-2402 (Li-Ion)	12V	Entire line of Milwaukee 12V M12 Li-lon Cordless Tools (Except M12 Plumb Laser & Sub-Scanner™ Tools)				
MIC	48-11-1014 48-11-1024 (NiCad)	14.4V	Entire line of Milwaukee 14.4V NiCad Cordless Tools		48-59-0255 48-59-0186 (Vehicle)	12V, 14.4V, 18V NiCad Charger	
	48-11-2230 48-11-2232 (NiCad)	18V	Entire line of Milwaukee 18V NiCad Cordless Tools				
	COMPACT 48-11-1815 (Li-Ion)	18V	Entire line of Milwaukee 18V Li-lon M18 Cordless Tools (NOT compatible with V18)		48-59-1801	18V Li-lon Charger for M18 Series Tools	
	High Capacity (XC) 48-11-1815 (Li-Ion)	18V	Entire line of Milwaukee 18V Li-lon M18 Cordless Tools (NOT compatible with V18)				
	V18 Series 48-11-1830 (Li-Ion)	18V	Entire line of Milwaukee 18V V18 Li-Ion Cordless Tools and ALL 18V NiCad Tools		48-59-2818	18V & 28V Li-Ion Char- ger AND 18V NiCad Batteries	
	M28 (V28) 48-11-2830 (Li-Ion)	28V	Entire line of Milwaukee 28V V28 Li-Ion Cordless Tools		48-11-1833	Battery/Charger Combo Pack Incl. (2) V18 Batteries	